




A Division of ECS
 918 Freeburg Avenue
 Belleville, Illinois 62220-2623

Phone 1-800-851-3153
 Fax 1-800-443-8648
 Web Site www.empirecomfort.com

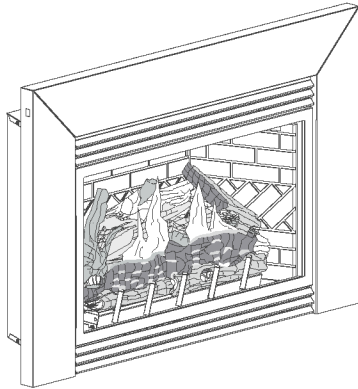

Innsbrook Direct-Vent Fireplace Insert

DV25IN33L




DV33IN33L

DV35IN33L



	DV25IN33L		DV33IN33L		DV35IN33L	
	LP	NAT	LP	NAT	LP	NAT
Input Btu/hr Maximum	25,000	25,000	33,000	33,000	35,000	35,000
Input Btu/hr Minimum	17,000	17,000	25,000	25,000	27,000	27,000
KWH Maximum	7.30	7.30	9.57	9.57	10.15	10.15
KWH Minimum	5.00	5.00	7.30	6.67	7.83	7.30
Orifice	#53	#42	#51	#34	#50	#33
Air Shutter Opening	Full Open	1/8	Full Open	3/16	Full Open	3/16

FIREPLACE DIMENSIONS (in inches)

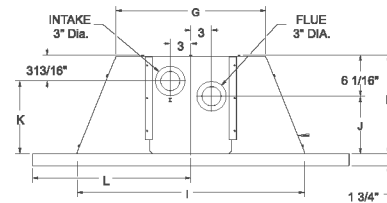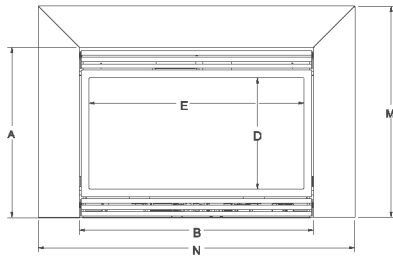

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N
DV25IN	19 3/8"	28	14 1/2"	11 1/8"	25 1/4"	12 3/4"	17"	18 5/16"	27"	6 3/4"	9"	20"	25 3/8"	40"
DV33IN	22 3/8"	31	16	14 1/8"	28 1/4"	14 1/4"	18 3/4"	21 5/16"	30"	8 1/4"	10 1/2"	21 1/2"	28 3/8"	43"
DV35IN	24 3/8"	34	16	16 1/8"	31 1/4"	14 1/4"	21 3/4"	23 5/16"	33"	8 1/4"	10 1/2"	23"	30 3/8"	46"

Fireplace Opening Dimensional Information/Sizing

MINIMUM FIREPLACE OPENING DIMENSIONS

MODEL NO.	HEIGHT A*	FRONT WIDTH B	DEPTH C	REAR WIDTH D
DV25IN	18 3/8"	27 1/2"	12 3/4"	17 1/4"
DV33IN	21 3/8"	30 1/2"	14 1/4"	19"
DV35IN	23 3/8"	33 1/2"	14 1/4"	22"

*Note: If the fireplace lintel is wider than 8" (203mm), the height of the fireplace opening must be increased a few inches to allow for a gradual offset in the exhaust and/or intake vent pipes.

