OUTDOOR: VENT-FREE GAS FIREPLACE SYSTEMS



Light up outdoor living with the VRE4600 Series linear gas fireplaces. Flames dance on a bed of crushed glass while adjustable, full-spectrum LED lights enhance the mood or season. The VRE4600 Series fireplace allows single-sided or optional see-through installation.

FEATURES

- ♠ Available in 36", 48", 60" and 72" linear configurations
- Transform your fireplace into a see-through model using the optional conversion kit
- Mood enhancing, adjustable full-spectrum interior LED lighting
- Diamond Crystal large crushed glass media included (Optional colors available)
- Dual-Glass deflector shield protects flames from wind
- Fuel-saving electronic ignition
- Stainless steel construction for long-lasting outdoor use
- ♦ Wall-mounted control box allows control of flames and interior lights
- ♠ Optional on/off, high/low, CPI/IPI remote control
- Optional stainless steel weather cover
- LP gas conversion kit sold separately
- 20-year limited warranty



VRE4636 shown with Sapphire Blue large crushed glass media & optional see-through kit

INTERIOR MEDIA OPTIONS



Diamond Crystal (included)




Sapphire Blue




Onyx Black

APPLIANCE SPECIFICATIONS

TOP VIEW

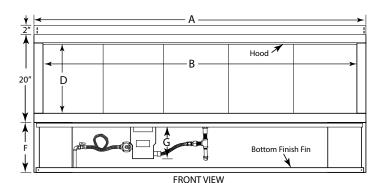



VRE4600

	36	48	60	72
Α	40"	52"	64"	76"
В	36"	48"	60"	72"
С	33-1/2"	33-1/2"	33-1/2"	33-1/2"
D	16"	16"	16"	16"
E*	16-1/4"*	16-1/4"*	16-1/4"*	16-1/4"*
F	11-1/2"	11-1/2"	11-1/2"	11-1/2"
G	8-3/4"	8-3/4"	8-3/4"	8-3/4"

^{*} Subtract 1/4" for see-through applications.

On the Cover: ODLVF72 shown with Diamond Crystal large crushed glass media.


IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location.

Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

FRAMING SPECIFICATIONS

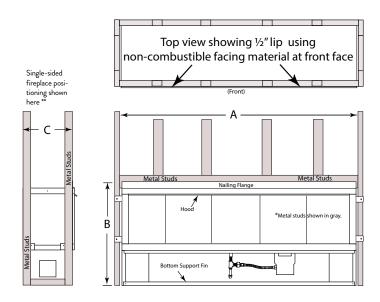

VRE4600

	36	48	60	72
А	40-1/2"	52-1/2"	64-1/2"	76-1/2"
В	33-3/4"	33-3/4"	33-3/4"	33-3/4"
C¹ SINGLE SIDED DEPTH	16-1/4"	16-1/4"	16-1/4"	16-1/4"
C ² SEE-THROUGH DEPTH	15"	15"	15"	15"

FIREPLACE BTU OPERATING RANGE

MODEL	FUEL	BTU/HR
ODLVF36	NG	31,000-18,500
ODLVF36	LP	30,000-19,500
ODLVF48	NG	43,500-24,500
ODLVF48	LP	42,500-29,000
ODLVF60	NG	50,000-36,000
ODLVF60	LP	50,000-36,000
ODLVF72	NG	65,000-42,000
ODLVF72	LP	60,000-45,000

