

# Cutout Specifications

GRILLS	H	W	DEPTH
MODEL	A	B	C
BLZ-3-NG/LP	8 ½	23 ¼	21 ¼
BLZ-4-NG/LP	8 ½	30 ¾	21 ¼
BLZ-4-CHAR	8 ½	30 ¾	21 ¼
BLZ-4LTE2-NG/LP	8 ½	30 ¾	21 ¼
BLZ-5LTE2-NG/LP	8 ½	38 ¾	21 ¼
BLZ-3PRO-NG/LP	10 ½	32 ¼	23 ⅝
BLZ-4PRO-NG/LP	10 ½	42 ½	23 ⅝
BLZ-4LTE2MG-NG/LP	8 ½	30 ¾	21 ¼

## SIDE BURNERS

MODEL	A	B	C
BLZ-SBI-NG/LP	2 ⅜	11 ¼	18
BLZ-SB2LTE-NG/LP	8 ½	10 ¾	20 ¾


## POWER BURNERS

MODEL	A	B	C
BLZ-PBLTE-NG/LP	8	14	19 ½
BLZ-PROPB-NG/LP	9 ¼	14	19 ½

## GRIDDLES

MODEL	A	B	C
BLZ-GRIDDLE-LTE-NG/LP	12	28 ¾	24 ¾

ACCESSORIES	H	W	DEPTH
MODEL	A	B	C
BLZ-DDC-39"-R	19 ½	37 ¾	20 ¾
BLZ-DDC-R	19 ½	30 ¼	20 ¾
BLZ-AD25-R	18 ¼	21 ¾	
BLZ-AD32-R	18 ¼	28 ¾	
BLZ-AD40-R	18 ¼	35 ¾	
BLZ-DRWI-R	10	15 ¾	21
BLZ-DRW2-R	19 ¾	15 ¾	21
BLZ-DRW3-R	27 ¾	15 ¾	21
BLZ-TRLP-DRW	24 ¼	18 ¾	15 ¾
BLZ-PTH-R	8 ¾	14 ½	8 ⅞
BLZ-SV-1420-R/LH	20 ¼	14 ¼	
BLZ-SINGLE 2417-R/LH	24 ¼	17	
BLZ-SH-2014-R	14 ¼	20 ¼	
BLZ-SH-2417-R	17	24 ¼	
BLZ-TREC-DRW	24 ¾	18 ⅛	23 ⅛
BLZ-TRNW-DRW	24 ¾	12	18 ¾
BLZ-30W-3DRW	27 ¾	27 ⅞	21
BLZ-ICEB-WH	20 ¼	20 ¼	20 ¾
BLZ-TRC-CB	5	10 ¾	10 ¾
BLZ-KMDO-SLV	33 ⅜	31 ¾	29 ¾
BLZ-DRY-STG	19 ½	30 ¾	19 ¾
BLZ-30CKT-SNK	9	28 ¾	23 ⅛

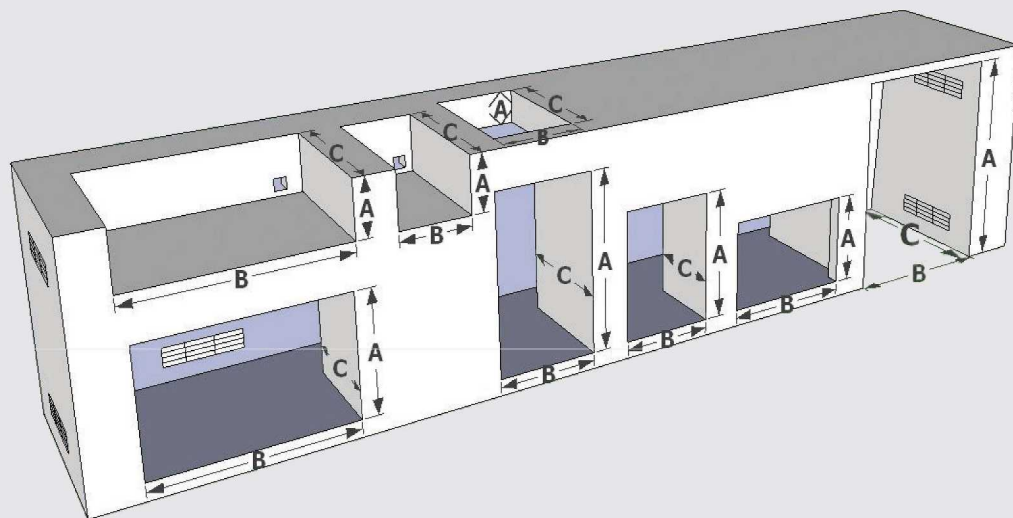

INSULATED JACKETS

	H	W	DEPTH
MODEL	A	B	C
BLZ-3-IJ	9 5/8	25 5/8	22 1/4
BLZ-4-IJ	9 5/8	33	22 1/4
BLZ-5-IJ	9 5/8	40 3/4	22 1/4
BLZ-3PRO-IJ	11	34 7/8	24 1/2
BLZ-4PRO-IJ	11	44 5/8	24 1/2
BLZ-SB2-IJ	9 5/8	13	22 1/4
BLZ-PB-IJ	9	16 1/2	20 5/8
BLZ-PROPB-IJ	10 1/4	16 1/2	20 5/8
BLZ-GRIDDLE-IJ	12 3/4	30 5/8	25

REFRIGERATOR AND TRIM KITS

	H	W	DEPTH
MODEL	A	B	C
BLZ-SSRF130	33 3/4	21 9/16	23
BLZ-SSRF-40DH	33 3/4	21 9/16	23 1/2
BLZ-SSRF-50DH	34 1/2	24 1/2	24 1/2
BLZ-TRIMKIT-4.1/4.5	33 3/4	21 9/16	
BLZ-TRIMKIT-5.2	34 1/2	24 1/2	
BLZ-ICEMKR-50GR	34	16 5/8	27 5/8
BLZ-TRIMKIT-ICEMKR	34	16 5/8	
BLZ-SSRF-DBDR5.1	34 1/4	24 1/2	26
BLZ-TRIMKIT-DR5.1	34 1/4	24 1/2	



- Your application will have additional requirements, consult owner's manual for full instructions.
- Ensure your island cavity is adequately vented. Number of vents shown in diagram is for informational purposes only. Consult your local licensed professional for adequate requirements.
- Ensure your outdoor kitchen is constructed out of non-combustible materials.
- If your outdoor kitchen is constructed of combustible materials, an insulated jacket is REQUIRED.
- Cutout dimensions do not allow for lid clearance or other measurement requirements. Consult the Owner's Manual for specifics.