

The art of smart-heating.



The Range

PLATINUM SMART-HEAT 300/500

Gas



TUNGSTEN SMART-HEAT


300 / 500

Gas



Electric





Innovation meets aesthetics, to bring you a powerful range of heaters that re-defines the world of heating. Patented Platinum Smart-Heat™ provides benefits never before seen in outdoor gas radiant heaters.

Our Gas Range gives you electronically controlled smartsafety; smart wind-resistance; one-switch, on/off smart venue-integration; smart cost-efficiency; wall or ceiling smart-mounting; flexible and directional smart-heating.



Top quality performance and the looks to match

The brushed stainless steel and ceramic medium makes Platinum Smart-Heat $^{\text{TM}}$ Gas suitable for the most exclusive outdoor or home environments. By protecting the tiles behind its translucent ceramic medium, effective heat is guaranteed in winds of up to 11mph.



Platinum Smart-Heat[™] Gas 300 Series Available in 300 / 500 Series LPG / Natural Gas



Able to withstand very high temperature, the tinted ceramic transforms obtrusive red glare emitted by traditional tiles into a soft glow. This enhances the overall experience of warmth, while ensuring even heat distribution.







Smart-safety means that electronic controls allow automatic re-ignition if the heater goes out. The integrated flame safety shut-off turns the heater off if it does not re-ignite.



Warm and even "comfort" heat is achieved by passing the radiant heat through the tinted ceramic medium. Directional ceiling or wall mounts create true positioning versatility. A dual-layer heat deflector allows for low-clearance installations.



Criniti's Darling Harbour, Sydney



A designed, costconscious product range that does not sacrifice aesthetics for function

The patented direct ignition system, never before seen on an outdoor gas radiant heater, ensures a reliable start and effective operation, even in winds of up to 8mph.



Tungsten Smart-Heat[™] Gas 300 Series Available in 300 / 500 Series LPG / Natural Gas



Bavarian Bier Cafe, Brisbane







Stainless steel with high temperature ceramic coating, maximizes long life and durability in tough outdoor environments. A neutral black finish ensures a fit with all decors.




Tungsten Smart-Heat[™] Gas 500 Series





An infrared electric heater blending aesthetics and function

Its stylish design provides efficient directional heating, compatible with smart control systems to enable precise dimming control with its simple one-touch on/off switch

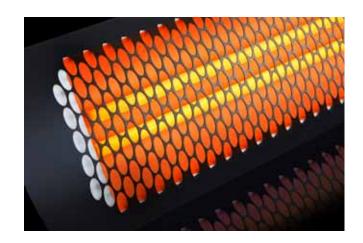




Tungsten Smart-Heat[™] Electric 2000W / 4000W



Tungsten Smart-Heat[™] Electric 3000W / 6000W









Water / splash resistance, the Tungsten Smart-Heat™ Electric works in almost any weather condition. The swivel bracket allows the heat to be directed in the desired location. It's equipped with a spectral reflector for excellent radiant heat output.



Tungsten Smart-Heat™ Electric like its predecessors is wall and ceiling mountable. It is available in four models of varying heating power, and carries on the legacy of innovation meeting aesthetics.

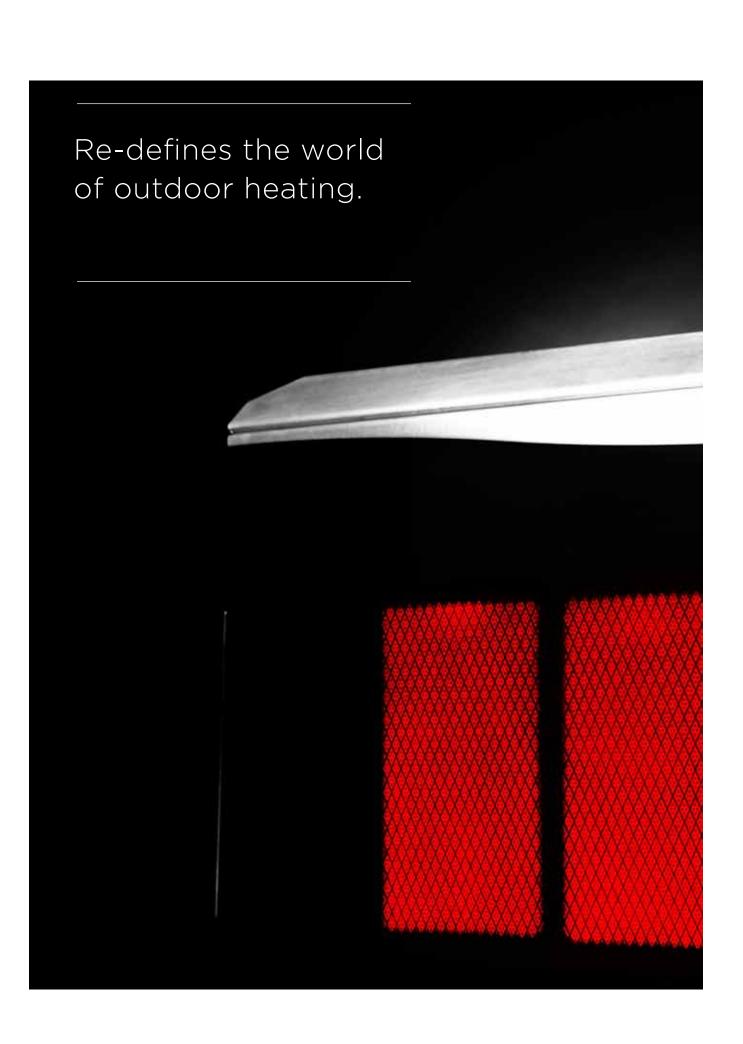


Dimensions

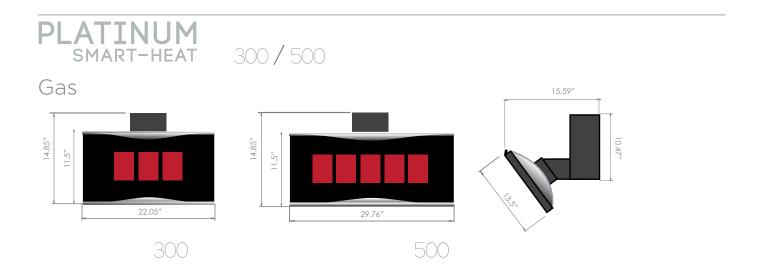


TUNGSTEN SMART-HEAT

300 / 500



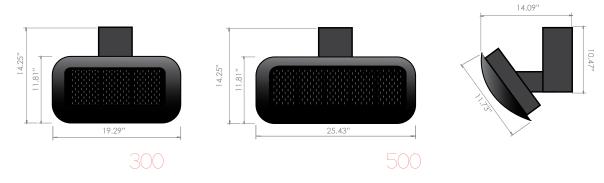

Electric

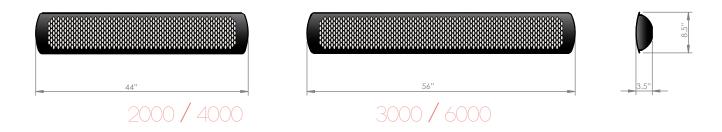

Specifications

PLATINUM SMART-HEAT 300 / 500

Gas



Heat output Dimensions excl. bracket Approx. area heated Approx. weight

BH0110001 (NG); BH0110002 (PRO) 23,000B10 (W) 22.05" x (D) 15.59" x (H) 14.85" Up to 120ft² 33lb 23.600BTU



Heat output Dimensions excl. bracket Approx. area heated Approx. weight

BH0110003 (NG); BH0110004 (PRO) 39.800BTU 33,000B10 (W) 29.76" x (D) 15.59" x (H) 14.85" Up to 200ft² 40lb

300

TUNGSTEN SMART-HEAT 300 / 500

Gas



Heat output Dimensions excl. bracket Approx. area heated Approx. weight BH0210001 (NG); BH0210002 (PRO) 26,000BTU (W) 19.29" x (D) 14.09" x (H) 14.25" Up to 120ft²



Heat output Dimensions excl. bracket Approx. area heated Approx. weight BH0210003 (NG); BH0210004 (PRO) 43,000BTU (W) 25.43" x (D) 14.09" x (H) 14.25" Up to 200ft²

2000 / 3000 / 4000 / 6000



Heat output Dimensions excl. bracket BH0420002 (2000W), BH0420004 (4000W) 2000W; 4000W (W) 44" x (D) 8.5" x (H) 3.5" 220 V / 9 Amps (2000W); 18.1Amps (4000W) 19.8lbs

2000 / 4000



Heat output Dimensions excl. bracket Power connection Approx. weight

BH0420003 (3000W), BH0420005 (6000W) BH0420003 (3000W), BH0420005 (6000W) 3000W; 6000W (W) 56" x (D) 8.5" x (H) 3.5" 220 V / 13.6Amps (3000W); 27.2 Amps (6000W) 22lbs

3000 / 6000

HEAD OFFICE: 1 Suttor Street, Silverwater, Sydney NSW 2128 Australia NORTH AMERICA POSTAL: 13223 Black Mountain Rd Suite 1305 San Diego, CA. 92129 T: 1800 301 1293 (within America) F: (858) 346-1388 E: info@bromicheating.com W: www.bromicheating.com