


TUNGSTEN

SMART-HEAT™ ELECTRIC

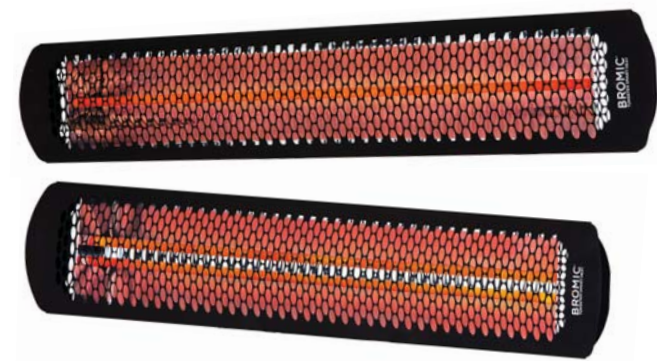

Standard Colours

Matte Black


Matte White

*Other colours available on request - qty requirements apply

NOW WITH A LIFETIME ELEMENT WARRANTY

An infrared electric heater blending aesthetics and function

The Tungsten Smart-Heat™ Electric range brings high-performance radiant heating to open outdoor applications and semi-enclosed spaces alike. This heater's extended body and parabolic specular reflector (PSR) provides a wide wall of heat across a vast footprint, maximizing the comfort created by each unit. Available in 4 models with heat outputs of up to 6kW, these units emit minimal light and present a scalable solution for those wishing to tailor heating systems specifically to the space serviced.

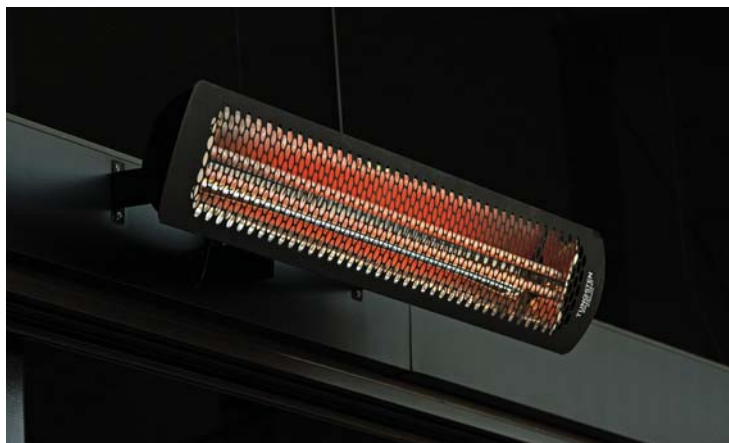

US0717TE

FEATURES

High-Performance Mesh Screen

The Tungsten's unique front cover manipulates infrared energy to maximize performance while achieving a superior spread of heat

Ultra-Durable Quartz Element

Translucent fused quartz houses a thick steel coil to create a high-output, durable element that emits a soft red glow

Parabolic Specular Reflector (PSR)

A mirror-finish anodized rear reflector directs lost infrared energy back towards the target, maximizing performance and efficiency

High-Temperature Coating

Attractive, corrosion-resistant black or white finish to suit any surrounding

Easy Installation

Mount the included bracket and connect power to create comfort in no time

Scalable Solution

Available in 2000W (2kW), 3000W (3kW), 4000W (4kW) and 6000W (6kW) models with the ability to adjust the output of individual elements

Ultra-Durable Design

Stainless steel construction ensures reliable heating for years to come


Precise Directional Heating

Accurately alter coverage through simple bracket adjustment

Wireless Control Capabilities


Genuine wireless control accessories allow seamless integration of remote heating output adjustment

HEAT AREA

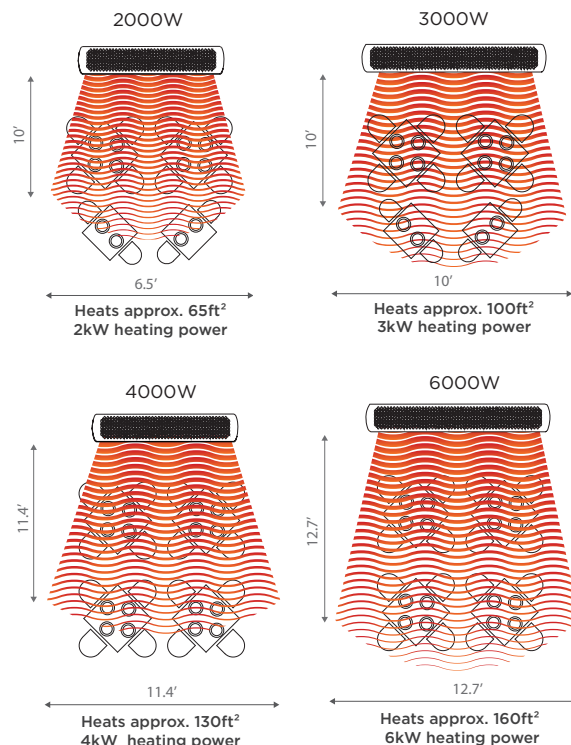

*Heat area dependent on ambient temperature and wind. Optimum conditions experienced at approx 60°F & in a low wind covered environment. Table layout indicative only.

DIMENSIONS

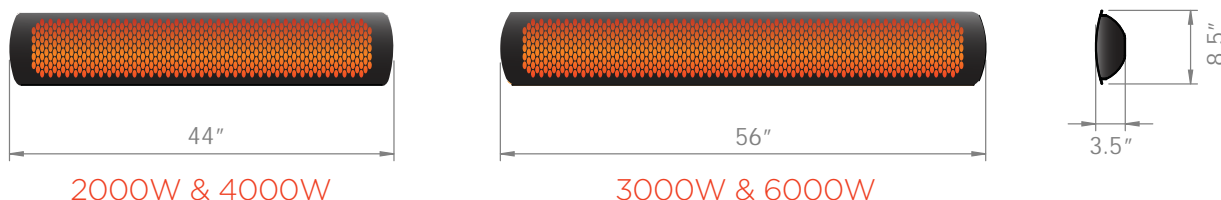

SPECIFICATIONS

Model	2000W	3000W	4000W	6000W
Part no.	BH0420030	BH0420031	BH0420032	BH0420033
	Black	--	--	--
	White	--	--	--
No. of Elements	Single element	Single element	Double element	Double element
Bracket Length	6.5"	6.5"	9.5"	9.5"
Power (Watts)	2000W	3000W	4000W	6000W
Heating Area*	up to 65ft ²	up to 100ft ²	up to 130ft ²	up to 160ft ²
Power connection required (Volts/Amps)	220-240V - A.C. - 50/60Hz - 8.3A	220-240V - A.C. - 50/60Hz - 12.5A	220-240V - A.C. - 50/60Hz - 16.6A	220-240V - A.C. - 50/60Hz - 25A
Dimension (W"xD"xH")	44" x 8.5" x 3.5"	56" x 8.5" x 3.5"	44" x 8.5" x 3.5"	56" x 8.5" x 3.5"
Minimum Mounting height requirement to ground	Ceiling Mounting (USA & Canada)- 96" (8') / Wall Mounting (USA) - 71" (6')/ Wall Mounting (Canada) - 96" (8')			
Weight (lb)	19.8lb	22lb	19.8lb	22lb
Finish	Black High Temperature Coating			

Product must only be installed and serviced by a licensed and authorised technician.

Product manual must be read before installing or servicing this product.

*Heating areas are based on protected environment with mounting height of 96" (8'). For unprotected and extremely cold and windy environments heating areas can be less. Please contact Bromic Heating for further advice.

4005951
CONFORMS TO UL STD. NO. 2021
CERTIFIED TO CSA STD. C22.2 NO.46

