


TUNGSTEN

SMART-HEAT™ GAS


A designed, cost-conscious product blending aesthetics and function

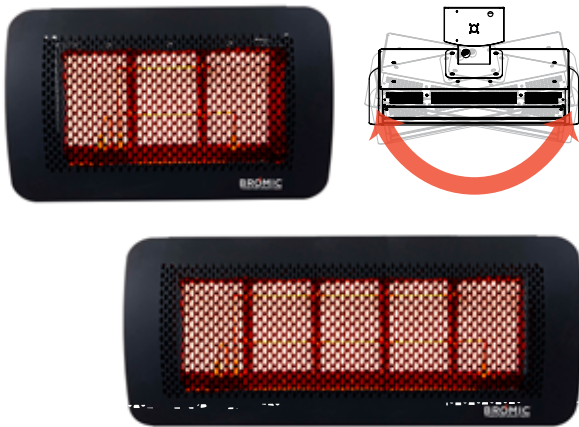

A designed, cost-conscious product range that does not sacrifice aesthetics for function.

The patented direct ignition system, never before seen on an outdoor gas radiant heater, ensures a reliable start and effective operation, even in winds of up to 8mph.

Easy pivot arm provides greater positioning versatility and heat coverage.

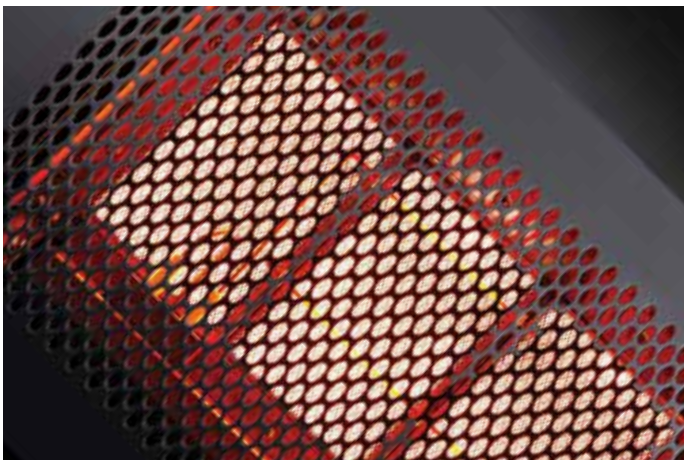

FEATURES

High-Performance Mesh Screen

The Tungsten's unique screen scientifically manipulates infrared energy to maximize performance while achieving a superior spread of heat

Ceramic Efficiency

Slow-release ceramic burners efficiently combust gas to fuel the most environmentally friendly gas-fired heating method available

Strong, Directional Heat

Robust radiant heat output with an easy pivot arm bracket for greater positioning versatility

Patented Direct Ignition

Automated direct ignition eliminates the need for a pilot, resulting in instantaneous ignition

Ultra-Durable Design

Stainless steel construction ensures reliable heating for years to come

Ease Of Use

Smart system compatibility and automated re-ignition allows users to simply set and forget

Exceptional Wind Resistance

Patented screen and ionization probe technology enables remarkable wind resistance, functioning reliably in winds of up to 12km/h or 8mph


Versatile Mounting

Reclaim valuable floor space through fixed heating with a range of ceiling and wall mounting options


Wireless Control Capabilities

Genuine wireless control accessories allow seamless integration of remote heater control

HEAT AREA

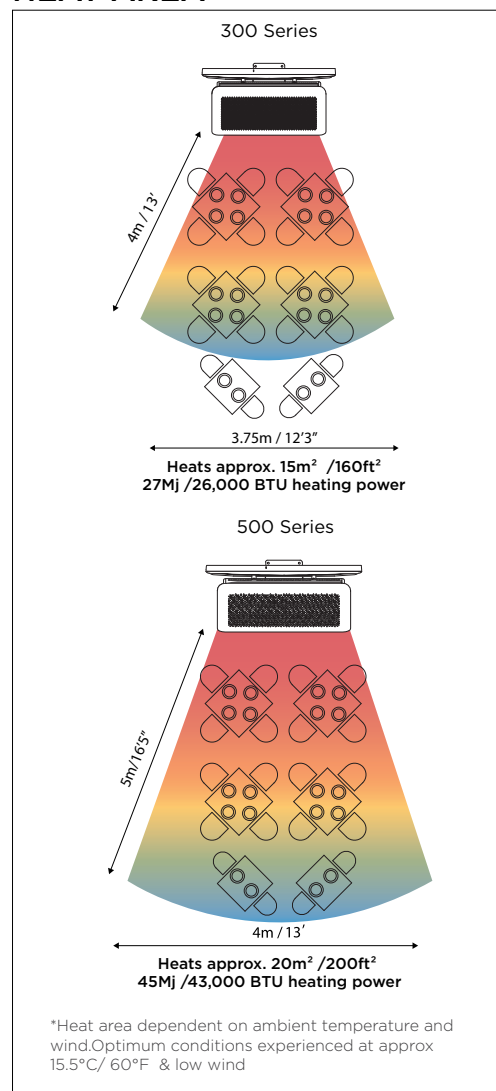

DIMENSIONS

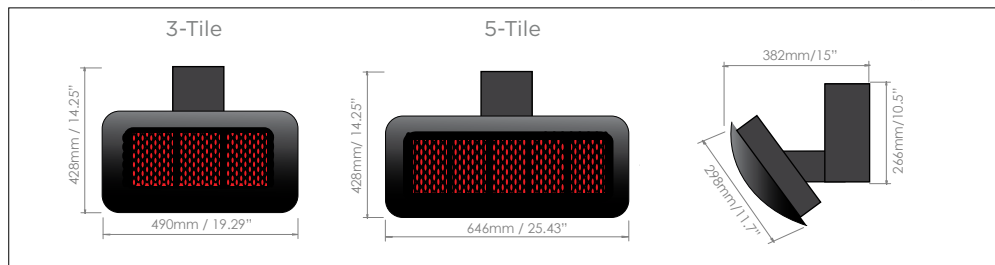

SPECIFICATIONS

Model		300	500
Part no.	LPG ¹	BH0210002	BH0210004
	Natural Gas ¹	BH0210001	BH0210003
Heat Deflector part no.		BH3030001	BH3030002
Ceiling Pole		5 pole lengths to suit ceiling heights of 10.5', 11.2', 11.8', 12.5' and 13' (contact Bromic Heating for more information)	
Heat Output (on LPG and NG)		26,000BTU	43,000BTU
Approximate area heated (feet²)		up to 160ft²	up to 200ft²
Gas connection		1/2" NPT Female	1/2" NPT Female
Electrical connection		110 Volt, 3-pin insulated plug	
Dimension (WxDxH)		19.29" x 14.09" x 14.25"	25.43" x 14.09" x 14.25"
Min. distance to combustible materials (without heat deflector) ²		Sides: 3'6" / 1100mm	
(with heat deflector)		Above (to ceiling): 3'6" / 1100mm	
		Above (to ceiling): 14" / 350mm	
Mounting height requirement to ground ³		8' / 2438mm	
Weight (lb)		33lbs	40lbs

¹Must only be installed by a licensed technician. Must complete "Pre-Installation Checklist" before installing. ²The temperature will not exceed 65°C/149°F above the ambient temperature. Please consult material manufacturer for temperature ratings ³8' / 2438mm or maybe lower depending on local regulations

T: 1 800 301 1293

E: INFO@BROMICHEATING.COM

W: BROMICHEATING.COM

HEAD OFFICE: 18 TECHNOLOGY DRIVE, SUITE 121 IRVINE, CA. 92618

USA 04/01/16

MINIMUM INSTALLATION CLEARANCES

