

Models:


TRAP-VSS

Extended Rain Shield/Vinyl Soffit Shield


This extended rain shield/vinyl soffit shield has been tested for use with DVP-TRAP1, DVP-TRAP2, SLP-TRAP1, SLP-TRAP2, and SLP-HHW2 termination caps. Check with your local building code agency before you begin installation to ensure compliance with local codes, including the need for permits and follow-up inspections. If you encounter any problems regarding code approvals, or if you need clarification of any of the instructions contained here, contact your Hearth & Home Technologies Inc. dealer. For the dealer nearest you, please visit www.hearthnhome.com.

CAUTION! Risk of Cuts, Abrasions or Flying Debris. Wear protective gloves and safety glasses during installation. Sheet metal edges are sharp.


1. If the rain shield on the top of your cap looks like this, then skip to step 5.

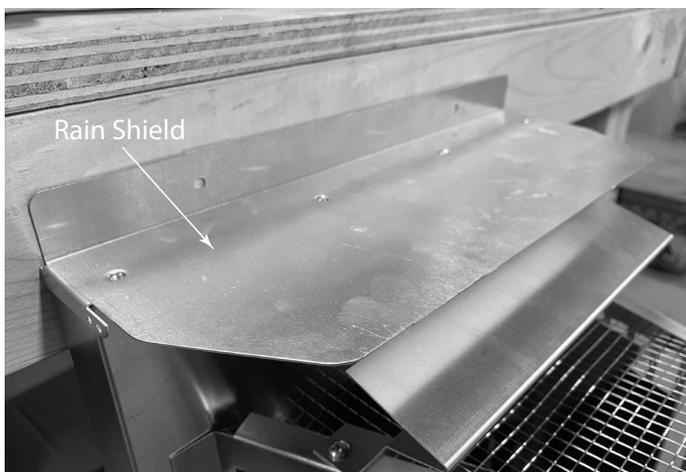

2. Bend the TRAP-VSS locating tabs as shown.

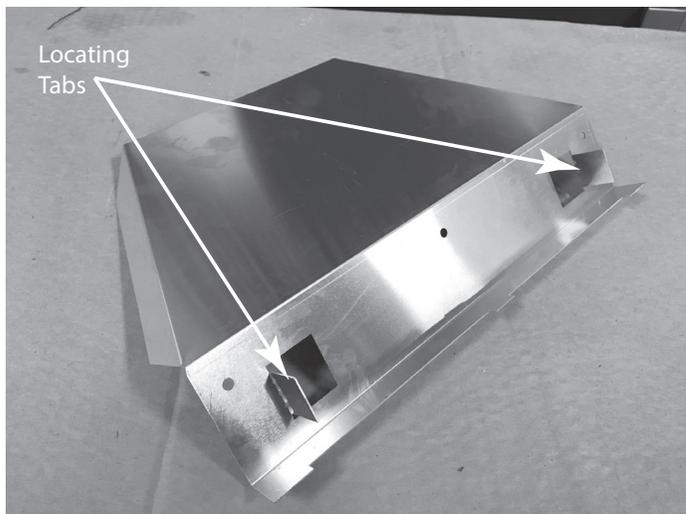

3. Position the TRAP-VSS onto existing cap as shown, and attached with (3) three screws provided. Make sure locating tabs are up against bottom edge of rain shield.

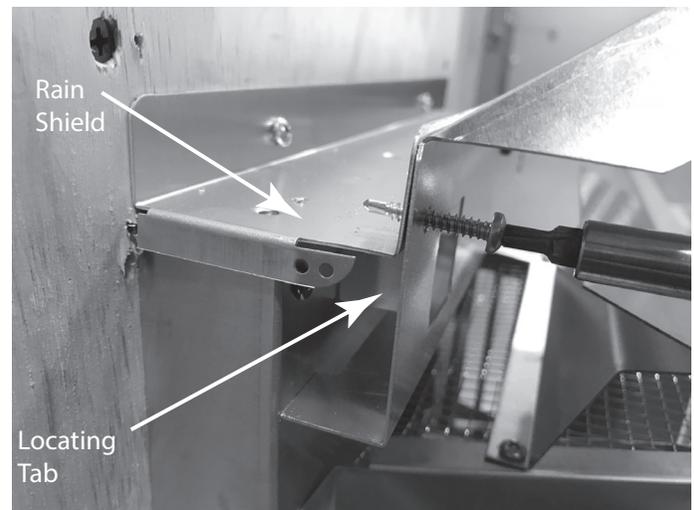

4. Lay bead of high temperature silicone in the channel between TRAP-VSS and cap rain shield to prevent water drainage between TRAP-VSS and rain shield.



5. Apply bead of high temperature silicone on bottom surface of TRAP-VSS. Position the TRAP-VSS onto cap as shown and attach with (3) screws provided. Clean excess silicone as needed.



6. Seal seams, corners, and cap to siding using silicone or polyurethane caulk to prevent leaks around cap base.

