




BUILT WITH PASSION.
OWNED WITH PRIDE.

PRODUCT SPECIFICATIONS

Information for Built-In and Portable Grills, Doors and Drawers

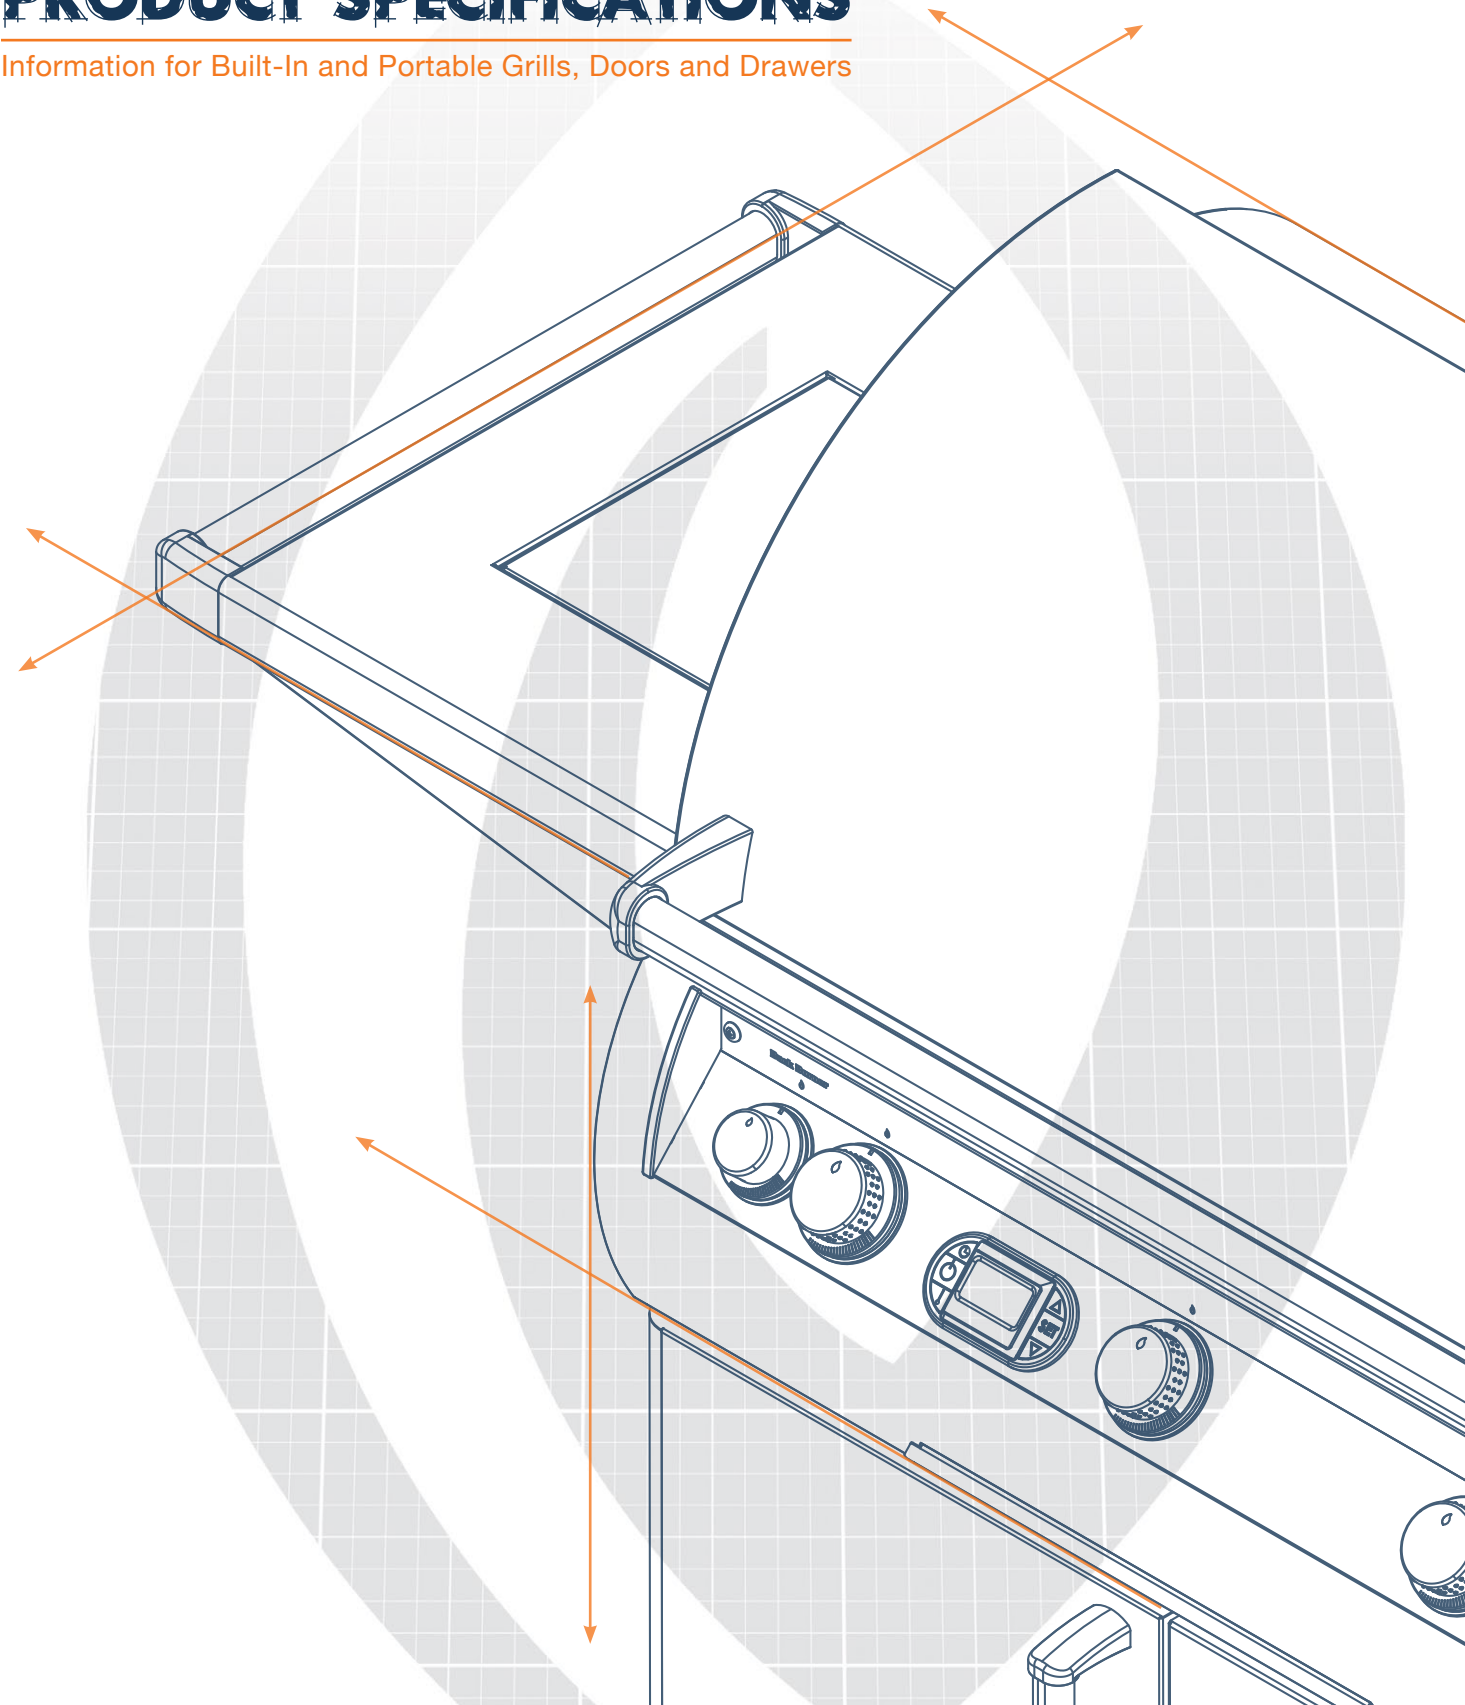

FOR ALL BUILT-IN UNITS
Must provide proper ventilation at
all times whether LP or NG.


12-S1 - Charcoal Built-In Grill

14-S1 - Charcoal Built-In Grill

11-S - Deluxe Built-In Grill

A830i - Gas/Charcoal Combo Grill

• A430i - Built-In
• C430i - Built-In

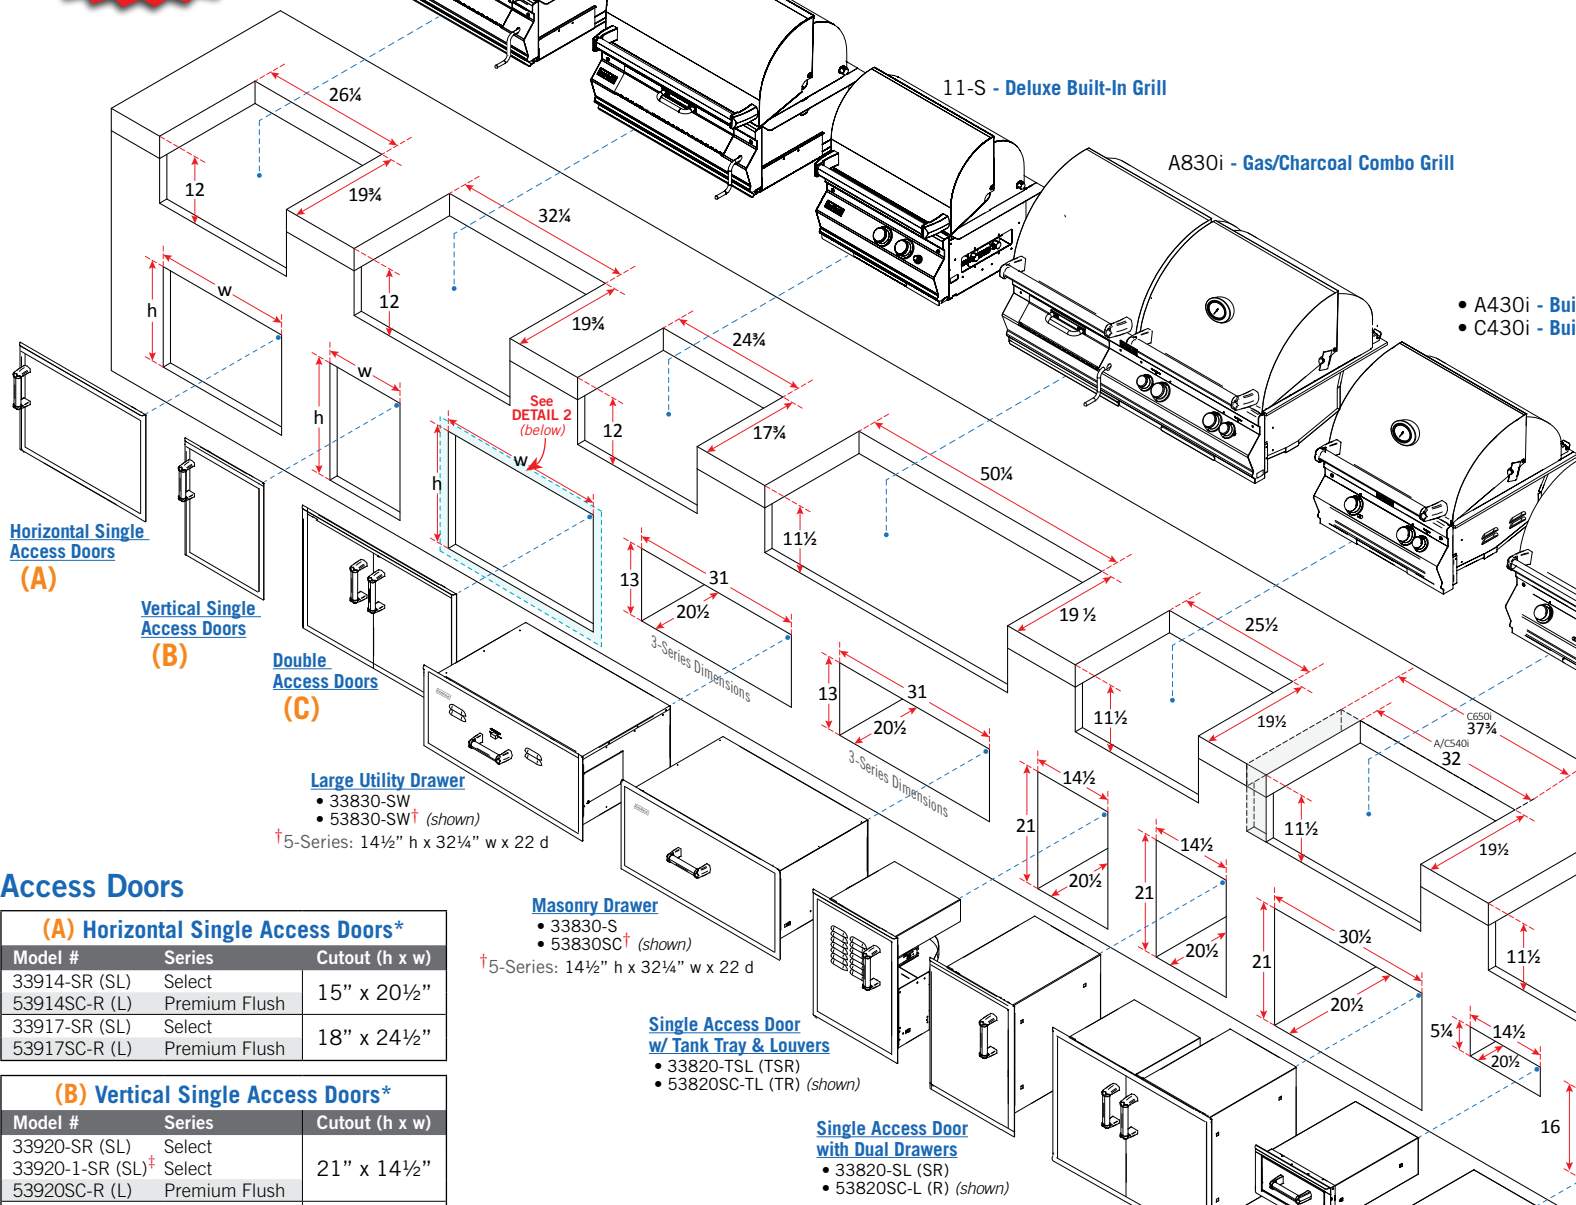

Horizontal Single Access Doors
(A)

Vertical Single Access Doors
(B)

Double Access Doors
(C)

Large Utility Drawer

- 33830-SW
- 53830-SW† (shown)

†5-Series: 14½" h x 32¼" w x 22 d

Masonry Drawer

- 33830-S
- 53830SC† (shown)

†5-Series: 14½" h x 32¼" w x 22 d

Single Access Door w/ Tank Tray & Louvers

- 33820-TSL (TSR)
- 53820SC-TL (TR) (shown)

Single Access Door with Dual Drawers

- 33820-SL (SR)
- 53820SC-L (R) (shown)

Double Doors w/Dual Drawers & Tank Tray

- 33930S-12 (-12T)
- 53930SC-12 (-12T) (shown)

(-12T) models include louvers

Double Doors with 2 Dual Drawers

- 33930S-22
- 53930SC-22

Single Drawer

- 33801
- 53801SC (shown)

Double Drawer

- 33802
- 53802SC (shown)

Triple Drawer

- 33803
- 53803SC (shown)

Stainless Steel Box with Timer
• 5520-11T (1-hour)

Double Stainless Steel Box with Timer
• 5520-12T (1-hour)

Access Doors

(A) Horizontal Single Access Doors*

Model #	Series	Cutout (h x w)
33914-SR (SL)	Select	15" x 20½"
53914SC-R (L)	Premium Flush	
33917-SR (SL)	Select	18" x 24½"
53917SC-R (L)	Premium Flush	

(B) Vertical Single Access Doors*

Model #	Series	Cutout (h x w)
33920-SR (SL)	Select	21" x 14½"
33920-1-SR (SL)†	Select	
53920SC-R (L)	Premium Flush	
33924-SR (SL)	Select	25" x 17½"
53924SC-R (L)	Premium Flush	


*Available with left or right door hinge

†Vertical single access door includes louvers


(C) Double Access Doors

Model #	Series	Cutout (h x w)
53934SC	Premium Flush	15" x 30"
33930S	Select	
53930SC	Premium Flush	21" x 30"
33938S	Select	
53938SC	Premium Flush	16" x 39"

Flange Overlap Dimensions / Select Doors

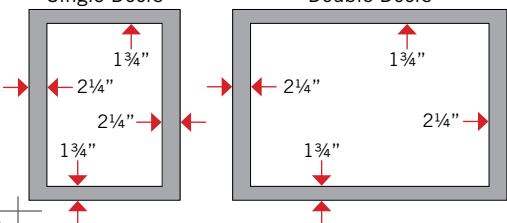

Flange Overlap Dimensions / Premium Flush Doors

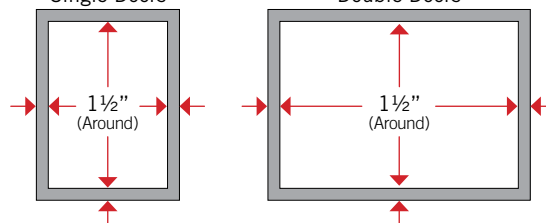

lt-In Grill (shown)
lt-In Grill

- A540i - Built-In Grill (shown)
- C540i - Built-In Grill
- C650i - Built-In Grill

- A660i - Built-In Grill
- E660i - Built-In Grill (shown)
- E660i - Built-In Gourmet Griddle

- A790i - Built-In Grill
- E790i - Built-In Grill (shown)

- E1060i - Built-In Grill


SEE NOTE 5

Access Door
with Double Drawer

- 33810S
- 53810SC (shown)

Access Door w/Double
Drawer & Platter Storage


- 33816S
- 53816SC (shown)

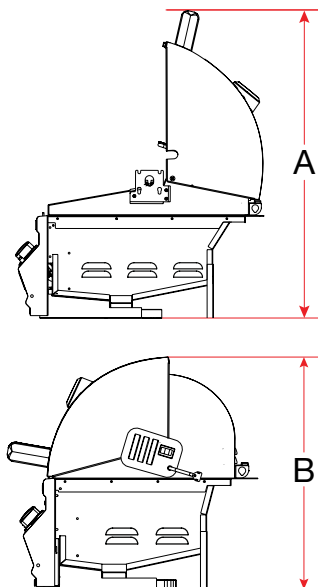

Description	Hood Open (A)	Hood Closed (B)
Echelon E1060i	36"	27"
Echelon E790i	36"	27"
Echelon E660i	36"	27"
Aurora A830i	32¼"	25½"
Aurora 790i	36"	27"
Aurora A660i	36"	27"
Aurora A540i/Choice C540i	32¼"	25½"
Aurora A430i/Choice C430i	32¼"	25½"
Choice C650i	32¼"	25½"
Deluxe 11-S	29¾"	25½"
32" Gourmet Charcoal 14-S1	31¾"	26½"
26" Gourmet Charcoal 12-S1	31¾"	26½"

FOR COUNTER-TOP OVERHANG

A notch must be cut into the overhang to allow the grill face to sit flush with the front wall. Also allow clearance for control panel removal.



OUTDOOR KITCHEN CONSIDERATIONS


- Provide ventilation in island for gas vapors to escape. Allow at least four ventilation openings (two at floor level and two 16" above floor 10 in² each) at opposing ends/sides
- Carefully consider grill size & accessories needed
- Combustible construction requires insulating liner
- Select Natural or Propane (LP gas)
- Determine total gas consumption for supply line size
- Access is required to gas connections and shut off valve
- Plan location of propane tank away from grill and appliances
- Always refer to the installation and operating instructions of your Fire Magic® grill and/or accessories for installation guidelines & safety warnings, before starting your project
- Always check all gas connections for leaks

LOCATION

- Identify outdoor area where grill will be installed
- Determine the utilities needed (gas, water, electricity, drainage, etc.)
- Consider element exposure (sun, wind direction*, weather, etc.)
* Wind blowing into or across the rear oven lid vent can cause poor performance and/or dangerous overheating. Orient the grill so that the prevailing wind blows toward the front of the grill.

MATERIALS


- Foundation - concrete
- Base - brick, stone, stucco, concrete
- Counter-top - tile, granite, marble, concrete

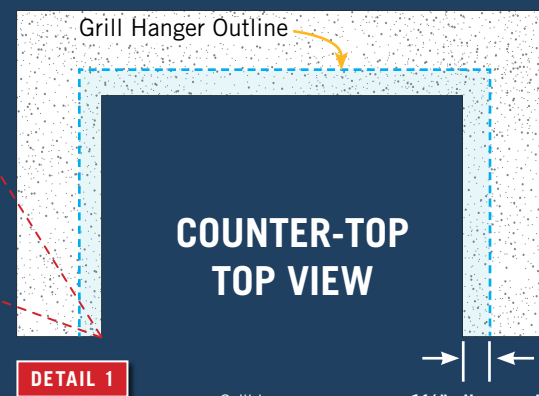

Notes


1. There is a hanger on three sides of each grill. You must allow clearance for the hanger (SEE DETAIL 1).
2. The control panel (face) of the grills is **wider** than the cutout width. This conceals the cutout space on the left & right hand sides.
3. Clearance of 10" on each side of the oven is recommended for unrestricted operation of lid and rotisserie and at least 3" at the rear flange for ease of maintenance and proper operation. (18" from combustible surroundings on each side and rear is required)
4. Insulating liners must be used & are available for combustible surrounds (See page 6).
5. The rotisserie motor on all models is located on the right side of the grill. Optional Reverse Brackets are available to mount rotisserie motor on opposite side. ONLY units ordered with back burner option come with rotisserie kit and brackets.

3" clearance required (on both sides) to access Master Switch & Meat Probe when using material that extends out from island surface.

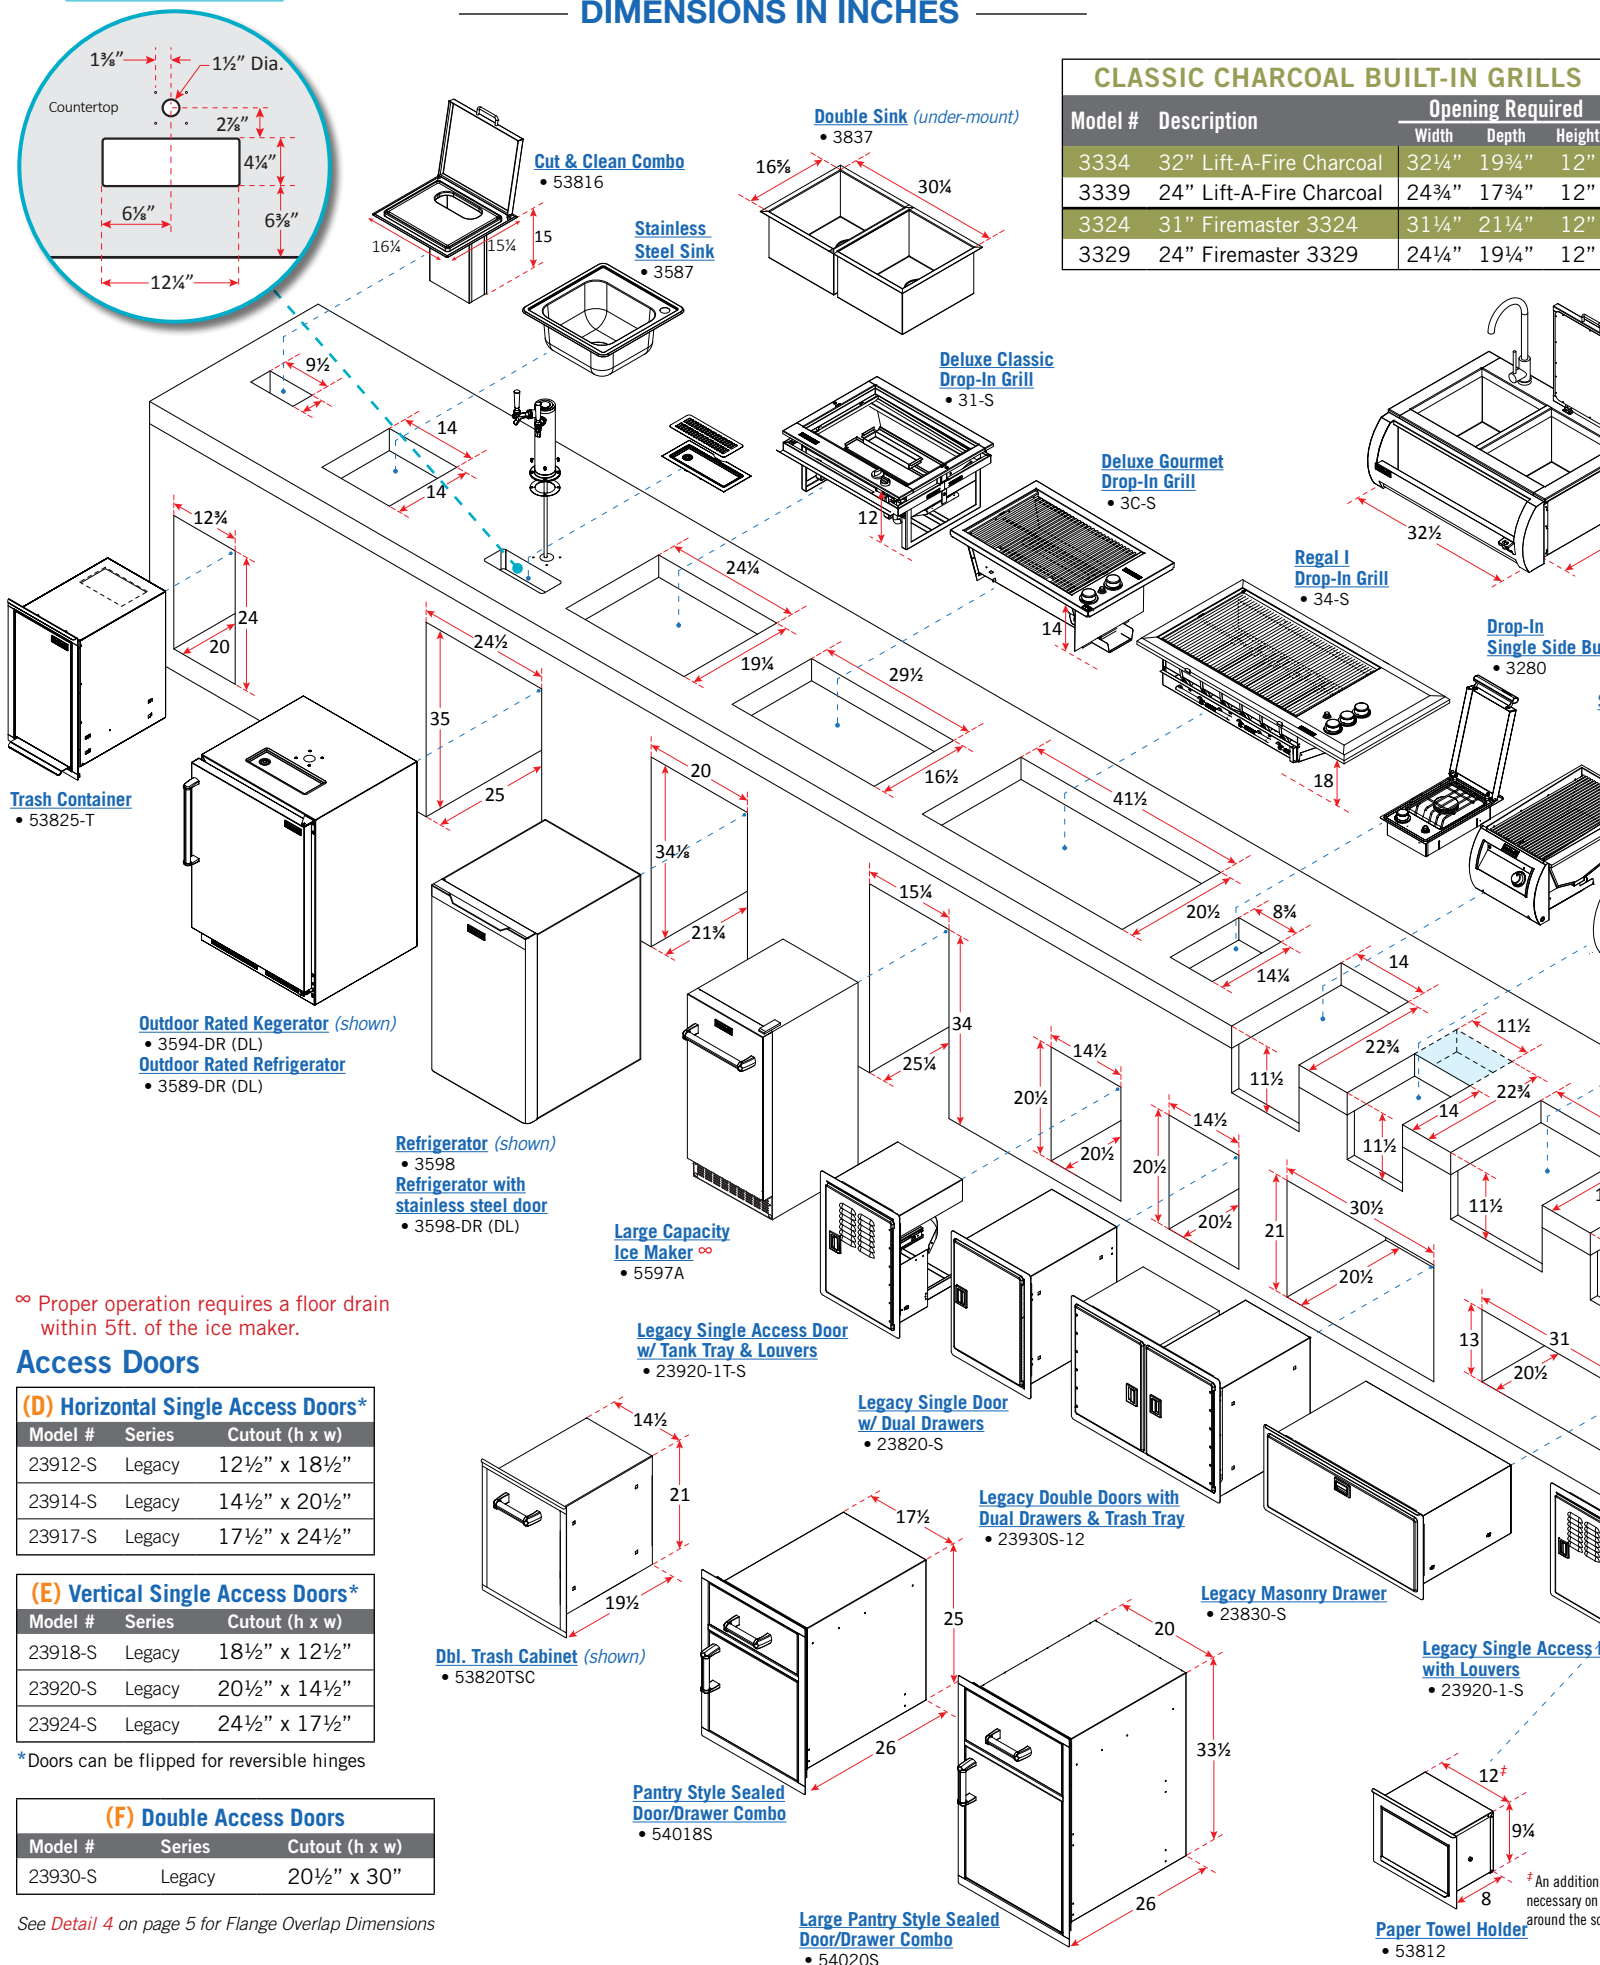

Pedestal Grill Dimensions

• C430s-RT1P-P6

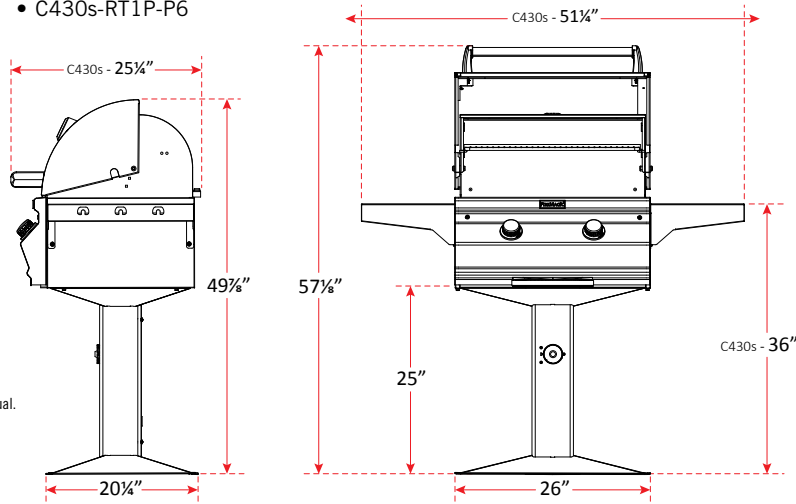

Beverage Butler


• 3835

An additional cutout is required for the faucet...see owner's manual.

12
20

Double Side Burner*

- 32815 (shown)
- 32817
- 3281R

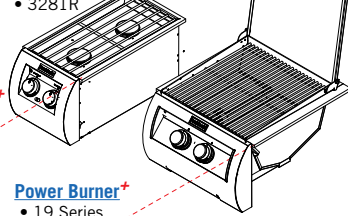


Double Searing Station*

- 32885-1 (shown)
- 32887-1
- 3288K-1



TOP VIEW



FOR COUNTER-TOP OVERHANG

A notch must be cut into the overhang to allow the accessory face to sit flush with the front wall. Also, allow clearance for control panel removal.

Notes

1. There is a hanger on three sides of the grill (SEE DETAIL 3).
2. The control panel (face) of the accessories is **wider** than the cutout width, this conceals the cutout space on the left & right hand sides.
3. Clearance of 10" on each side, and 3" at the rear of the oven is recommended for unrestricted operation of accessories. (18" from combustible surroundings on each side and rear)
4. Insulating liners must be used and are available for combustible surrounds. Double Side burner (3281), Single Side burner (3279-1) and Drop-In Side burner (3280) do not require an insulating liner (See page 6).

Accessory Hanger Outline



DETAIL 3


Most accessory hangers measure 1 1/2" all around.

The exceptions are: The Bar Caddy (1D-S0), The Beverage Butler (3835), Refreshment Centers (3596A, 33596), and Beverage Centers (1D-SSA, 1D-SSD)... these units have a hanger that measures 2 1/2" all around.

Searing Station*


Searing Station*

- 32875-1 (shown)
- 32877-1
- 3287K-1




Single Side Burner*

- 32795-1 (shown)
- 32797-1
- 3279R-1




Power Burner*

- 19 Series




Bar Caddy

- 1D-S0




Drop-In Refreshment Center

- 33596




Slide-In Refreshment Center

- 3596A





Built-In Pizza Oven

- 5600



See
DETAIL 3
(at right)

See
DETAIL 4
(at right)



Horizontal Single Access Doors

(D)

Vertical Single Access Doors

(E)

Double Access Doors

(F)




Louvered Venting Panel

- 5510-01

al 1/2" clearance is
each side, directly
crew assembly.

Door/Drawer Frame Outline

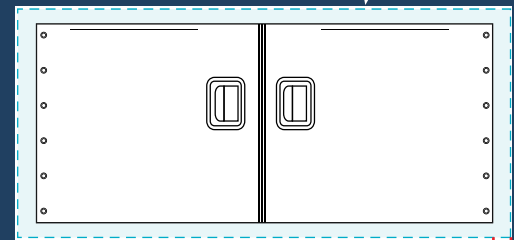


DETAIL 4


Door frame varies in width (1"-2" ALL AROUND) depending on the size & configuration of the door & drawer.

Flange Overlap Dimensions / Legacy Doors

Single Doors





Double Doors



* 3" clearance required (on both sides) to access Master Switch when using material that extends out from island surface. (applies to Side Burners, Power Burners, Searing Stations, & Pizza Oven)

INSULATING LINER MUST BE USED WHEN INSTALLING IN A COMBUSTIBLE ISLAND

Not used on Double Side burner (3281), Single Side burner (3279-1) or Drop-In Side burner (3280) ‡

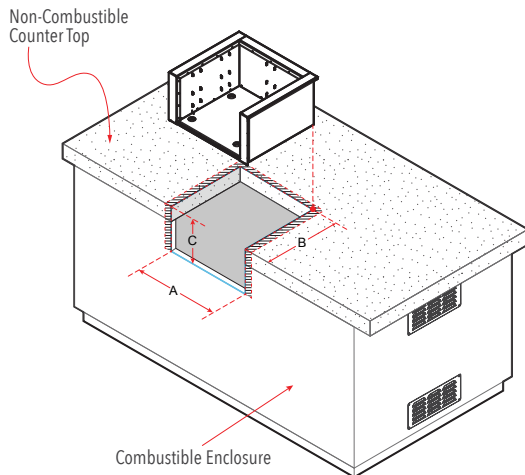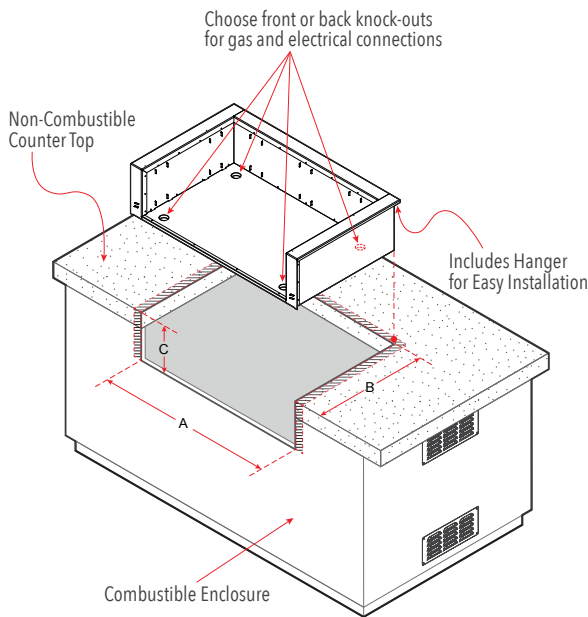

INSULATING LINER CUT-OUT DIMENSIONS (ECHELON, AURORA & CHOICE GRILLS)


Grill Model	Insulating Liner Part #	Opening Required		
		Width	Depth	Height
Echelon		(A)	(B)	(C)
E1060i	3185-52	54 ⁷ / ₈ "	26"	12 ¹ / ₄ "
E790i	3186-52	42"	26"	12 ¹ / ₄ "
E660i	3176-52	36 ¹ / ₄ "	26"	12 ¹ / ₄ "
Aurora				
A790i	3186-52	42"	26"	12 ¹ / ₄ "
A660i	3176-52	36 ¹ / ₄ "	26"	12 ¹ / ₄ "
A540i	23150-52	37"	22 ¹ / ₈ "	12 ¹ / ₄ "
A430i	23130-52	30 ³ / ₈ "	22 ¹ / ₈ "	12 ¹ / ₄ "
Choice				
C650i	3177-52	42 ¹ / ₂ "	22 ¹ / ₈ "	12 ¹ / ₄ "
C540i	23150-52	37"	22 ¹ / ₈ "	12 ¹ / ₄ "
C430i	23130-52	30 ³ / ₈ "	22 ¹ / ₈ "	12 ¹ / ₄ "

INSULATING LINER CUT-OUT DIMENSIONS (LEGACY & ACCESSORIES)

Product Model	Insulating Liner Part #	Opening Required		
		Width	Depth	Height
		(A)	(B)	(C)
Deluxe Grill	3100-51	28 ³ / ₈ "	19 ³ / ₄ "	12 ¹ / ₄ "
Power Burner	3278-52	23"	20 ⁷ / ₈ "	12 ¹ / ₄ "
DbL. Searing Station	3278-52	23"	20 ⁷ / ₈ "	12 ¹ / ₄ "
Searing Station	3287-52	18 ¹ / ₂ "	24 ³ / ₄ "	12 ¹ / ₄ "

‡ Single and Double Side Burners may be installed into a combustable enclosure provided there is a minimum of a **1/2" airspace between ALL SIDES** of the unit and any combustable material.

To install and operate the Fire Magic® outdoor gas appliance, please refer to the Installation and Operating instructions and safety precautions shipped with the appliance.

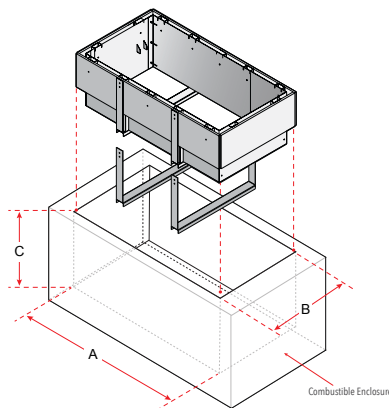




INSULATING LINER CUT-OUT DIMENSIONS (DROP-IN GRILLS)

Product Model	Insulating Liner Part #	Opening Required		
		Width	Depth	Height
		(A)	(B)	(C)
Regal Gourmet Drop-In	3270-50	44 ⁷ / ₈ "	24 ¹ / ₄ "	24 ³ / ₄ "
Deluxe Gourmet Drop-In	3220-50	31 ³ / ₈ "	19 ⁵ / ₈ "	19"
Deluxe Classic Drop-In	3200-50*	28 ¹ / ₂ "	23 ⁵ / ₈ "	14"

* Insulating liner for Deluxe Classic Drop-In grill is not represented in the diagram.




The information provided is for reference only. Detailed instructions are supplied with the insulation liner, unique to the model selected. Read those instructions carefully and completely before starting installation of the liner.

ECHELON PORTABLE GRILLS & GRIDDLE

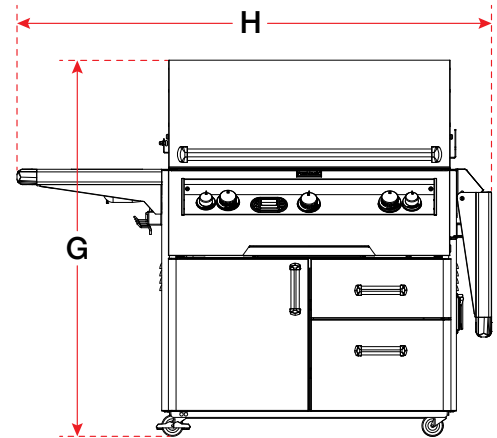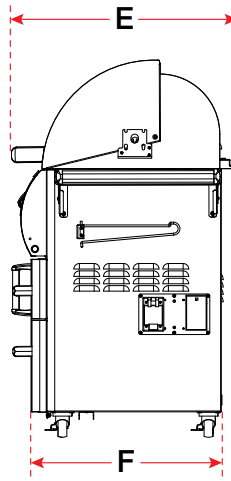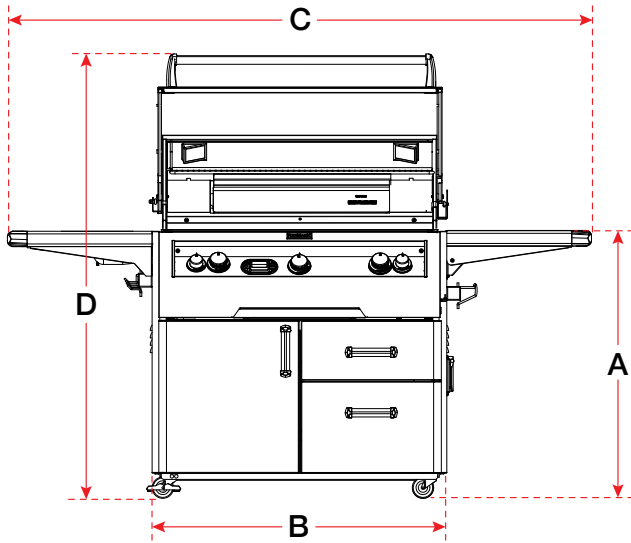

Model #	Series	Top of Shelf height (A)	Cart Base width (B)	Shelves Up width (C)	Oven Open height (D)	Max Outer depth (E)	Cart Base depth (F)	Oven Closed height (G)	1-Up/1-Down width (H)	Shelves Down width (I)
E1060s	62	37"	53 $\frac{1}{8}$ "	92 $\frac{1}{4}$ "	61 $\frac{3}{8}$ "	30 $\frac{1}{2}$ "	26"	52 $\frac{1}{2}$ "	69 $\frac{3}{4}$ "	n/a
E1060s	51	37"	77 $\frac{3}{4}$ "	117"	61 $\frac{3}{8}$ "	30 $\frac{1}{2}$ "	26"	52 $\frac{1}{2}$ "	96 $\frac{3}{4}$ "	n/a
E790s	62	37"	40"	79 $\frac{1}{4}$ "	61 $\frac{3}{8}$ "	30 $\frac{1}{2}$ "	26"	52 $\frac{1}{2}$ "	62 $\frac{3}{4}$ "	n/a
E790s	71	37"	58 $\frac{3}{4}$ "	98"	61 $\frac{3}{8}$ "	30 $\frac{1}{2}$ "	26"	52 $\frac{1}{2}$ "	83 $\frac{3}{4}$ "	n/a
E660s	62	37"	34 $\frac{1}{4}$ "	73 $\frac{1}{2}$ "	61 $\frac{3}{8}$ "	30 $\frac{1}{2}$ "	26"	52 $\frac{1}{2}$ "	59"	n/a

AURORA/CHOICE PORTABLE GRILLS

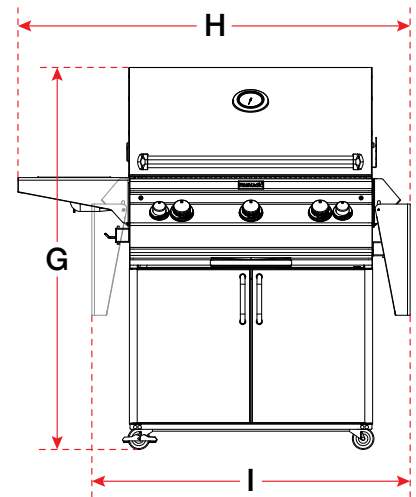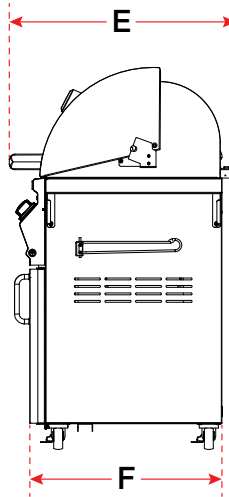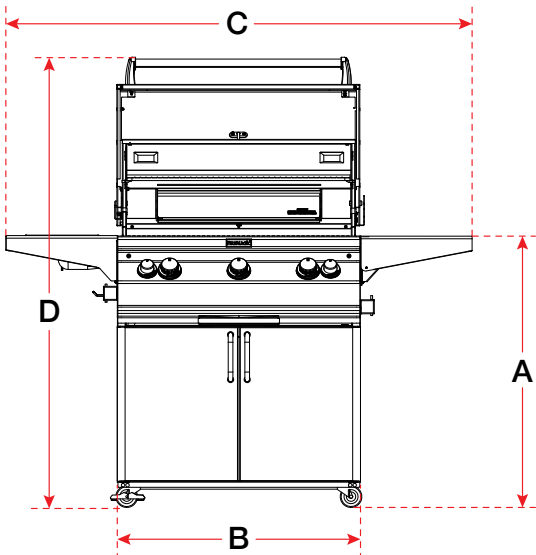

Grill Model #	Series	Top of Shelf height (A)	Cart Base width (B)	Shelves Up width (C)	Oven Open height (D)	Max Outer depth (E)	Cart Base depth (F)	Oven Closed height (G)	1-Up/1-Down width (H)	Shelves Down width (I)
A660s	61/62	37"	32 $\frac{1}{2}$ "	61 $\frac{1}{4}$ "	60 $\frac{7}{8}$ "	30 $\frac{1}{2}$ "	26"	52"	51"	40 $\frac{1}{2}$ "
A540s	61/62	37"	32 $\frac{1}{2}$ "	62 $\frac{1}{4}$ "	57 $\frac{1}{4}$ "	26"	21 $\frac{3}{4}$ "	50"	52"	41 $\frac{1}{2}$ "
A430s	61/62	37"	26"	55 $\frac{3}{4}$ "	57 $\frac{1}{4}$ "	26"	21 $\frac{3}{4}$ "	50"	45 $\frac{1}{2}$ "	35 $\frac{1}{4}$ "

VENT HOODS


MODELS AVAILABLE

VENT HOODS	SIZE	DUCT COVERS*	SPACERS*
36-VH-7	36"	36-VH-7-DC	36-VH-7-02
42-VH-7	42"	42-VH-7-DC	42-VH-7-02
48-VH-7	48"	48-VH-7-DC	48-VH-7-02
60-VH-7	60"	60-VH-7-DC	60-VH-7-02

* Duct Covers and Spacers must be used together.

SPECIFICATIONS

Electrical Requirements	120VAC / 15 AMP minimum / 60 Hz / GFCI outlet
Convertible Fans (top-vent or rear-vent)	120 volts, 1200 CFM High Pressure Output
Power Consumption	1,010 watts
Halogen Lights Rating	120V / 50 watt halogen light bulb

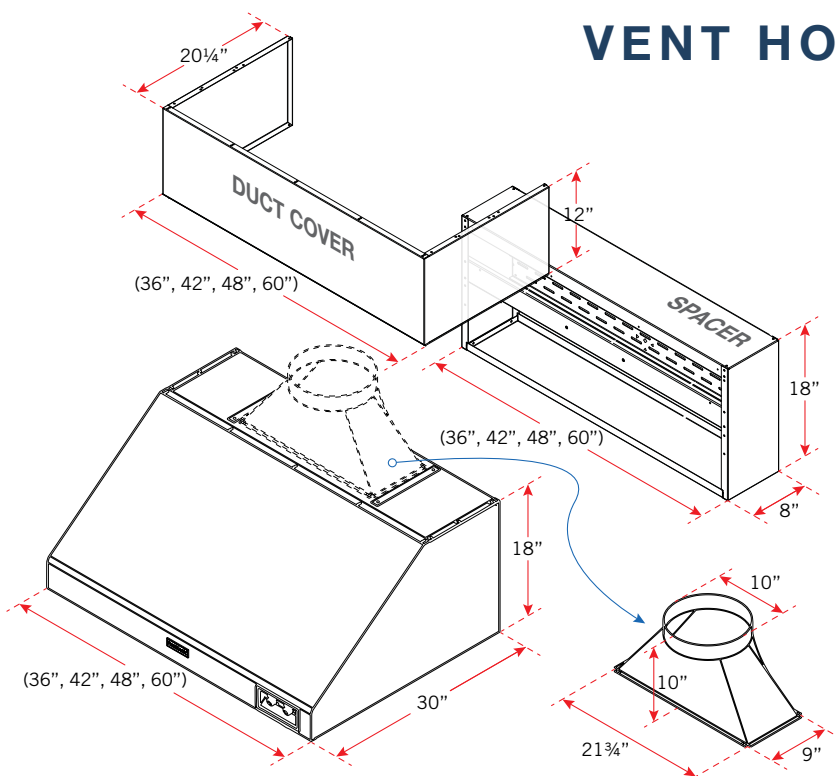

Fire Magic® Outdoor Grill Warranty Highlights

Lifetime Warranty

CAST STAINLESS STEEL BURNERS, CHOICE STAINLESS STEEL U-SHAPED BURNERS, DIAMOND SEAR AND ROD STAINLESS STEEL COOKING GRIDS, AND STAINLESS STEEL HOUSINGS ARE WARRANTED FOR AS LONG AS YOU OWN YOUR FIRE MAGIC® GRILL.

Fifteen (15) Year Warranty

BRASS VALVES, INNER LINERS, MANIFOLD ASSEMBLIES, PORCELAIN HOUSINGS (INCLUDING OVENS AND BARBECUE FACES), AND BACKBURNER ASSEMBLIES (EXCEPT IGNITION PARTS).

Ten (10) Year Warranty

ELECTRIC GRILLS STAINLESS STEEL COOKING GRIDS AND HOUSINGS.
GOURMET GRIDDLES AND PIZZA OVENS (EXCEPT IGNITION AND ELECTRONIC PARTS).

Five (5) Year Warranty

FLAVOR GRIDS, INFRARED BURNERS IN THE GRILL, AND CHARCOAL STAINLESS STEEL GRILLS (EXCEPT FOR THE CHARCOAL PAN, CHARCOAL GRID, THERMOMETER AND ASH TRAY; WHICH ARE WARRANTED FOR ONE (1) YEAR).

Three (3) Year Warranty

SIDE BURNERS AND ALL OTHER FIRE MAGIC® GRILL, GOURMET GRIDDLE AND PIZZA OVEN COMPONENTS (EXCEPT IGNITION AND ELECTRONIC PARTS).

One (1) Year Warranty

IGNITION SYSTEMS (EXCEPT BATTERIES), ELECTRONIC COMPONENTS (INCLUDING LIGHTS & THERMOMETERS) AND GRILL, GOURMET GRIDDLE AND PIZZA OVEN ACCESSORIES.

FIRE MAGIC® RESERVES THE RIGHT TO AMEND PRODUCT SPECIFICATIONS WITHOUT PRIOR NOTICE.

The information provided in this document is for reference purposes only. Detailed instructions & specifications unique to the product purchased can be found in the Owner's Manual. Read those instructions carefully and completely before attempting installation of any Fire Magic® Outdoor Grill product.

FIREMAGIC®