




Log Placement Instructions

Models: SC18-R, SC24-R, SC30-R

▲WARNING!

The positioning of the logs is critical to the safe, clean operation of this gas log set. Sooting and other problems may result if the logs are not properly positioned per these instructions. Failure to position in accordance with the diagrams below, or failure to use only parts specifically approved for this log set may result in property damage or personal injury.

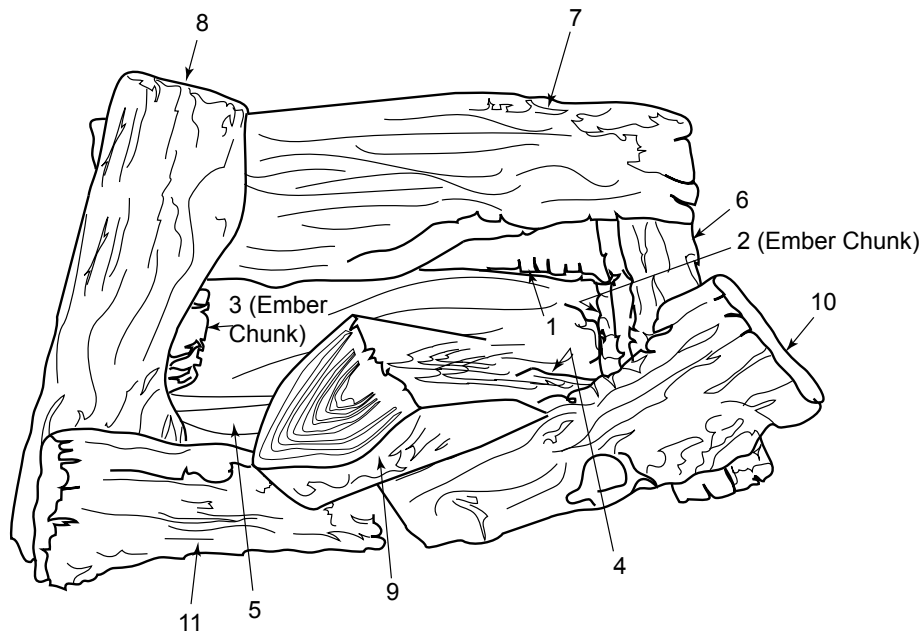

REF.	DESCRIPTION	QTY	SC18-R	SC24-R	SC30-R
1	Bottom Rear Log #1	1	20303558	20303570	20303570
2	Ember Chunk #2 (notch on both ends)	1	81D0110	81D0110	81D0110
3	Ember Chunk # 3 (notch on one end)	1	81D0110	20303559	20303559
4	Front Bottom Right Log #4	1	20303560	20303571	20303943
5	Front Bottom Left Log #5	1	20303561	20303572	20303944
6	Mid Right Log #6	1	20303562	20303573	20303573
7	Mid Rear Log #7	1	20303563	20303574	20303574
8	Mid Left Log #8	1	20303564	20303575	20303945
9	Center Log #9	1	20303565	20303576	20303576
10	Top Front Right Log #10	1	20303566	20303577	20303946
11	Top Front Left Log #11	1	20303567	20303578	20303578

STONY CREEK SC18/24/30-R LOGS PLACEMENT

1. Place bottom log (#1) on two (2) pins on rear of grate assembly and push towards rear as far as possible. Figure 1

NOTE: Installation instructions are the same for 18", 24", and 30" log sets. Pictures used in this manual illustrate the 24" set. Some variation may exist between the images and the set.



Figure 1

2. Place the ember chunk (#2) with notch on both ends on the grate bar right side of the burner adjacent to the controls. Push towards rear as far as possible. Figure 2
3. Place the ember chunk (#3) with notch on one end on the grate bar left side of the burner with notch towards rear. Push towards rear as far as possible. Figure 2

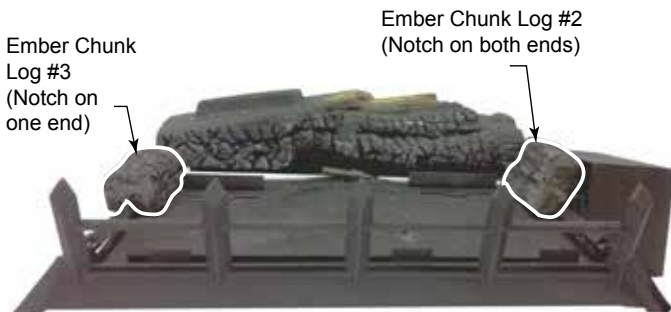


Figure 2

4. Place front bottom right log (#4) on right pin located on burner and right grate bar. Figure 3



Figure 3

5. Place front bottom left log (#5) on left pin located on burner and left grate bar. The right side of the log should rest on log #4. Figure 4
6. Place mid right log (#6) on bottom rear log (#1) and front bottom right log (#4) by placing notch on bottom of log on locating block on log #1. Place front of log in notch of log #4. Figure 4

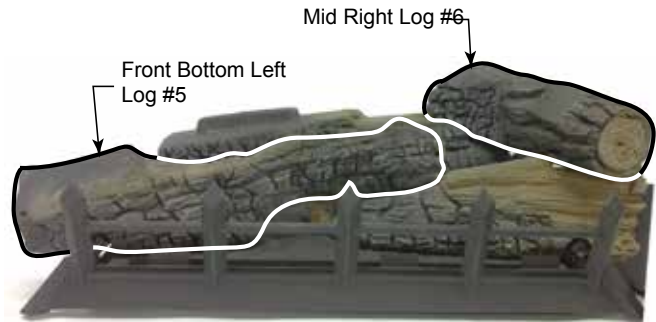


Figure 4

7. Place mid rear log (#7) on bottom rear log (#1) and mid right log (#6) by placing notch on bottom of log onto locating block on log #1. Right side of log will rest on log #6. Figure 5

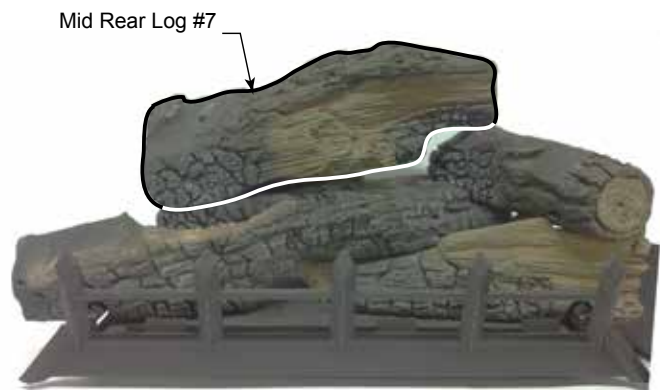


Figure 5

8. Place mid left log (#8) on mid rear log (#7) and front bottom log (#5) by placing notches on bottom of log onto locating blocks on log #7 and log #5. Figure 6
9. Place center log (#9) onto front bottom left log (#5) by placing notch on bottom of log #9 onto locating block on log #5. The flat triangle-shaped end of log #9 should be towards front with pointed end of log resting on bottom rear log (#1). Figure 6

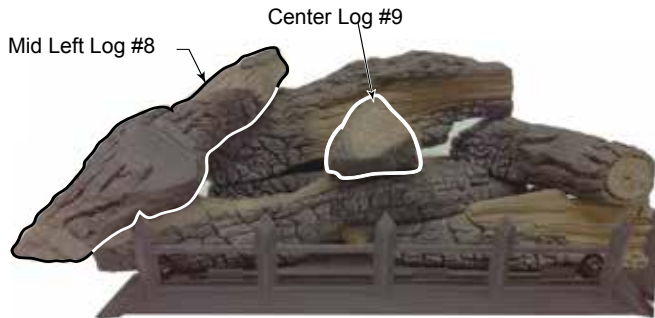


Figure 6

10. Place top front right log (#10) onto mid right log (#6) by placing notch on bottom of log onto locating block on log #6. Rest bottom end of log onto grate bar. Figure 7
11. Place top front left log (#11) onto mid left log (#8) by placing notch on bottom of log onto locating block on log #8. Rest bottom end of log onto grate bar. Figure 7

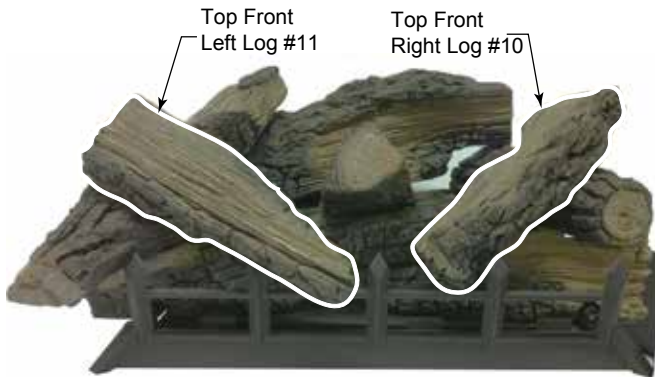


Figure 7

PLACE THE DECORATIVE ROCK

Optional volcanic rock may be placed around the unit on the floor of the firebox. Be sure to avoid any areas on the burner itself.

CAUTION

DO NOT sprinkle volcanic rock on the logs, around the pilot, or on or near burners. This may cause sooting. Place volcanic rock only on the floor of the fireplace.

During initial operation of the new heater, new burning logs and/or rock wool will give off a paper burning smell and orange flames will be present. Simply open the windows for a few hours to vent the odor.



LOVE AT FIRST LIGHT

Monessen, a brand of Hearth & Home Technologies
 7571 215th Street West, Lakeville, MN 50044
www.monessenhearth.com