



DIRECT-VENT FIREPLACE

Rushmore DVCT50CBP

Spec Sheet



GLASS VIEWING AREA

36 1/2" W x 47 3/8" H

ACTUAL DIMENSIONS

58" W x 48 1/2" H x 24 3/8" D

INCLUDES

- TruFlame Technology
- Multi-Function Remote
- Fireplace Barrier Screen
- Noncombustible Board

REQUIRES

- Liner
- Log Set: Forest Timber


TECHNICAL INFORMATION

- Maximum heat output:
56,500 BTUs (Nat), 55,000 BTUs (LP)
- Weight: 397 lb.
- Clearances
 - Back: 0"
 - Side Wall: 2"
 - Floor: 0"
 - Top of Unit: 36"
 - Top Framing Edge: 0"
- Type of Gas: LP or Natural
- Iron Pipe Size: 1/2-inch
- Ignition Systems: Multi-Function
- Vent Size: 5 x 8-inch Top Vent Only
(12-inch rise before horizontal)


FIELD INSTALLED ACCESSORIES

- Liners: Black Porcelain; Old World Stone; Fire Cracked Brick
- Twin Blower
- Andirons: Matte Black

DVCT50CBP

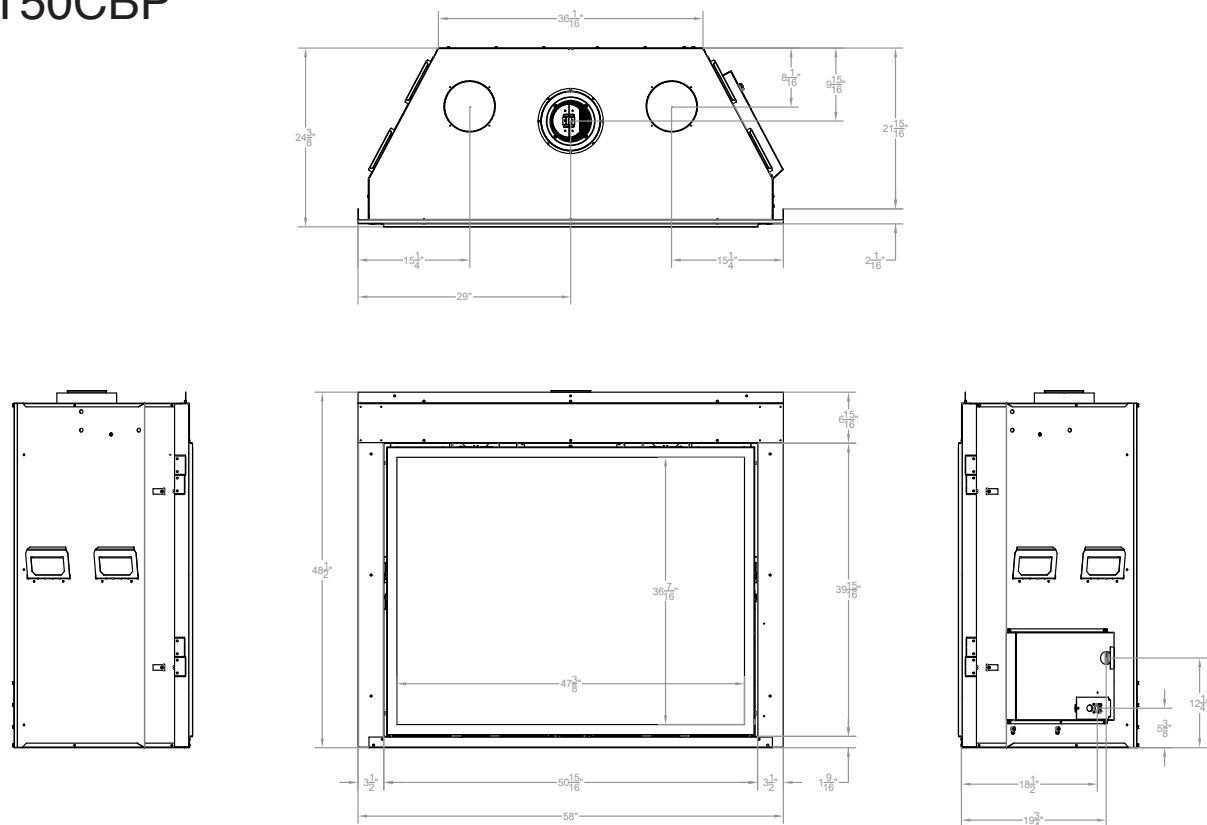

Clearance to Combustibles (in inches)		
	Distance from Wall Facing	Distance from Top of Opening
A	2	12
B	4	13-5/8
C	6	15-5/16
D	8	17
E	10	18-5/8
F	12	22

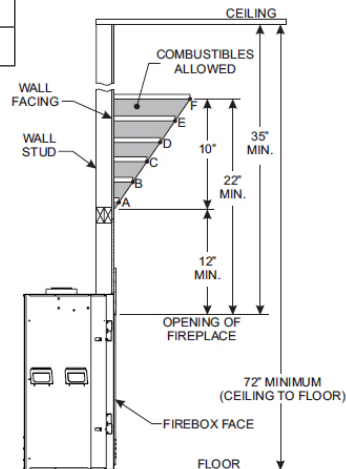

Framing Dimensions (in inches)	
Height (A)	58 1/2
Width (B)	58 1/2
Depth (C)	24

