

# DIRECT-VENT FIREPLACE Rushmore TruFlame DVCT40CBP

Spec Sheet



#### **GLASS VIEWING AREA**

36" W x 30 3/8" H

#### **ACTUAL DIMENSIONS**

49" W x 42 3/4" H x 24" D

#### **INCLUDES**

- Fireplace Barrier Screen
- TruFlame Technology
- Multi-Function Remote
- Noncombustible Board

#### **REQUIRES**

- Liner
- Log Set: Driftwood or Traditional Charred


#### **TECHNICAL INFORMATION**


- Maximum heat output: 45,000 BTU (LP), 47,500 BTU (Nat)
- Weight: 317 lbs.
- Clearances
- -Back: 0"
- Side Wall: 2"
- Floor: 0"
- Top of Unit: 24"
- Top Framing Edge: 0"
- Type of Gas: LP or Natural
- Iron Pipe Size: 1/2-inch
- Ignition Systems: Multi-Function
- Vent Size: 5 x 8 inch Top Vent Only (12-inch rise before horizontal)


## FIELD INSTALLED ACCESSORIES


- Liners: Black Porcelain walls, matte floor and ceiling
   Old World Stone walls, floor, ceiling
   Rustic Banded Brick walls, floor, ceiling
- Twin Blower
- Andirons: Matte Black

### **DVCT40CBP**










Clearance to C	ombustibles (in inches)	
Back	0	
Side	2	
Floor	0	
Top of Unit	24	
Top Framing Edge	0	
SEE MANTEL C FOR MAXIMI MANTEL DEF FINISHED WALL (COMBUSTIBLE) FRAMING HEADER NONCOMBUSTIBLE BOARD INSTALLED OVER APPLIANCE  NAILING FLANGES	JM →   <b>←</b>	

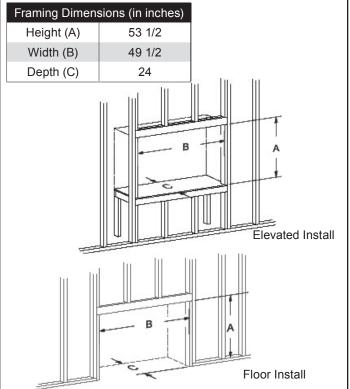

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes - wood grain and color will vary. Adjust light levels and use "natural light" incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:










This appliance is design-certified to the ANSI standard by:







Empire Comfort Systems Inc. 918 Freeburg Ave. Belleville, IL 62220-2623 info@empirecomfort.com