

Direct-Vent Fireplaces

Rushmore DVCT40CSP

Spec Sheet



GLASS VIEWING AREA

ACTUAL DIMENSIONS

57 1/4" W x 49 1/2" H x 25 9/16" D

- Multi-Function remote to control the:
 - Front and rear burner 6-step variable
- Independent rear burner on/off
- - Catalyst allows large flame, extensive ember bed and clean burn
- Log Set: Traditional Charred


TECHNICAL INFORMATION


- Maximum heat output: 60,500 BTUs (Nat), 55,000 BTUs (LP)


- Ignition Systems: Multi-Function
- Vent Size: 5 x 8-inch Top Vent Only (12-inch rise before horizontal)

- Liners: Black Porcelain; Old World Stone; Fire Cracked Brick; Herringbone


DVCT40CSP







Clearance to Combustibles (in inches)		
	Distance from Wall Facing	Distance from Top of Opening
Α	2	1 4
В	4	15 5/8
С	6	17 5/16
D	8	19
E	10	20 5/8CEILING
F	12	24 COMBUSTIBLES
WALL FACING WALL STUD 10' MIN. 24' MIN. OPENING OF FIREPLACE 72' MINIMUM (CEILING TO FLOOR) FIREBOX FACE FLOOR		

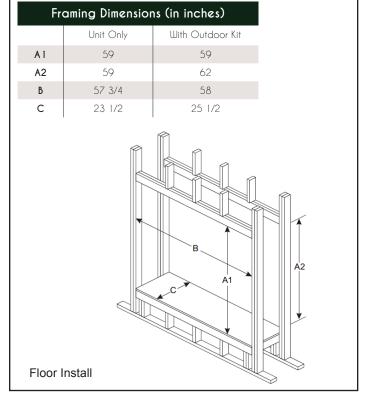

Empire is committed to continuous product improvement; specifications are subject to change without notice. Dimensions in this brochure are approximate; read and follow the framing dimensions in the owners manual supplied with your Empire product. Flame size, shape, and color will vary from photos. Our mantels feature natural veneers and hand-rubbed finishes - wood grain and color will vary. Adjust light levels and use "natural light" incandescent bulbs to enhance the dramatic look for your wooden mantel.

Member of the following industry associations:









This appliance is design-certified to the ANSI standard by:







SINCE 1932

Empire Comfort Systems Inc. 918 Freeburg Ave. Belleville, IL 62220-2623 info@empirecomfort.com