


DIRECT-VENT INSERTS





GLASS VIEWING AREA

25 1/2" W x 15 1/4" H

ACTUAL DIMENSIONS

30 11/16" W x 19" H x 17 9/16" D

INCLUDES

- Multi-Function Thermostat Remote
- Light
- Blower
- Fireplace Barrier Screen

REQUIRES


- Log Set Driftwood or Traditional Charred
- Liner Black Ceramic Glass, Old World Stone or Rustic Brick
- Surround:
- Metal, 3-sided, 1-piece
 36" W x 24" H x 1" D
 40" W x 27" H x 1" D
 42" W x 29" H x 1" D
 44" W x 31" H x 1" D
- Metal, Flush 3-Sided, 1-piece 36" W x 24" H 42" W x 29" H

TECHNICAL INFORMATION


- Maximum heat output: 30,000 BTU (Natural), 28,500 BTU (Propane)
- Weight: 114 lbs.
- Type of Gas: Natural or Propane
- Iron Pipe Size: 1/2-inch
- Ignition Systems:Multifunction Remote
- Vent Size: 3 x 4 Flex

FIELD INSTALLED ACCESSORIES

 Decorative Fronts and Insets:
 Forged Iron, Distress Pewter - Arch or Rectangular

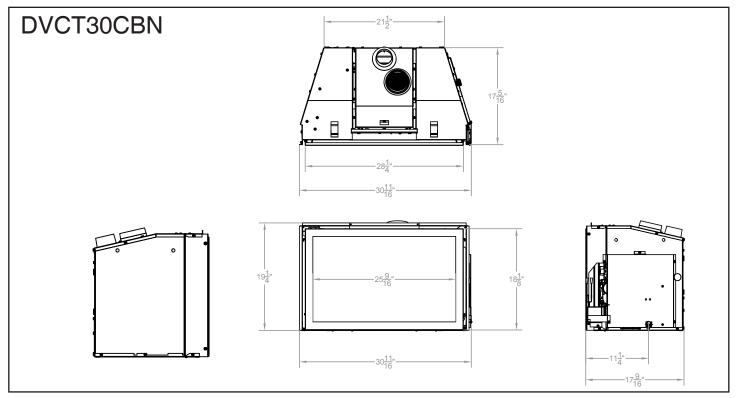


Trim Clearances			
INDEX LETTER	DISTANCE FROM FIREPLACE FACE	DISTANCE FROM TOP OF OPENING	
	(Dimensions in inches)		
	Maximum	Minimum	
Α	1-3/4	12	
В	4-1/2	16	
С	7-1/4	17	
D	9-1/4	20	
E	12	21	



	place Opening s (in inches)	
Height (A)	19 1/2	
Front Width (B)	31 1/4	
Depth (C)	18	
Rear Width (D)	22	
HHHHHH		N. DIA. FLUE EQUIRED

B



Member of the following industry associations:









This appliance is design-certified to the ANSI standard by:









SINCE 1932

Empire Comfort Systems Inc. 918 Freeburg Ave. Belleville, IL 62220-2623 info@empirecomfort.com