


Log Placement Instructions

Models: BO18-R, BO18-F, BO24-R, BO24-F, BO30-R, BO30-F

AWARNING!

The positioning of the logs is critical to the safe, clean operation of this gas log set. Sooting and other problems may result if the logs are not properly positioned per these instructions. Failure to position in accordance with the diagrams below, or failure to use only parts specifically approved for this log set may result in property damage or personal injury.

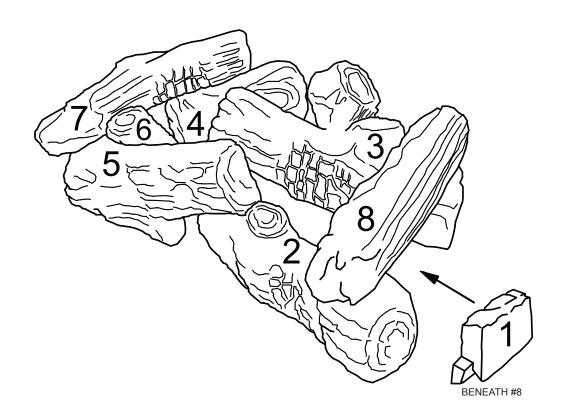

REF.	DESCRIPTION	QTY	BO18-R	BO18-F	BO24-R	BO24-F	BO30-R	BO30-F
1	Ember Chunk	1	81D0110	81D0109	81D0110	81D0109	81D0110	81D0109
2	Right Front Log	1	81D0059	81D0083	81D0067	81D0091	81D0075	81D0099
3	Right Rear Log	1	81D0060	81D0084	81D0068	81D0092	81D0076	81D0100
4	Left Rear Log	1	81D0061	81D0085	81D0069	81D0093	81D0077	81D0101
5	Left Front Log	1	81D0062	81D0086	81D0070	81D0094	81D0078	81D0102
6	Middle Left Log	1	81D0063	81D0087	81D0071	81D0095	81D0071	81D0095
7	Left Top Log	1	81D0064	81D0088	81D0072	81D0096	81D0072	81D0096
8	Right Top Log	1	81D0065	81D0089	81D0073	81D0097	81D0073	81D0097

LOG INSTALLATION

NOTE: Installation instructions are the same for 18", 24", and 30" log sets. Pictures used in this manual illustrate the 24" set. Some variation may exist between the images and the set included with this manual.

INSTALL 18", 24" AND 30" (F, R) BERKLEY OAK LOGS ON NATURAL BLAZE BURNER

- 1. Place the #1 log (the "chunk") on the grate bar right side of the burner adjacent to the controls. Figure 1.
- 2. Place front right log (#2) on right pin located on burner and right grate bar. Figure 2. slide Log #1 forward so that it is tight against log #2.

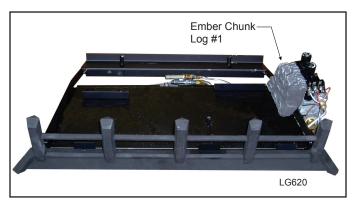


Figure 1. Place Ember Chunk log #1

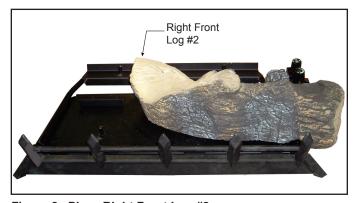


Figure 2. Place Right Front Log #2

3. Place right rear log (#3) on pin located on rear support bracket and rest left side of log on front right log. See Figure 3.

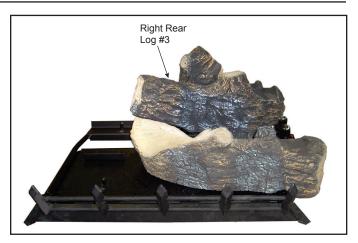


Figure 3. Place Right Rear Log #3

4. Place left rear log (#4) on pin located on rear support bracket on left side. See Figure 4.

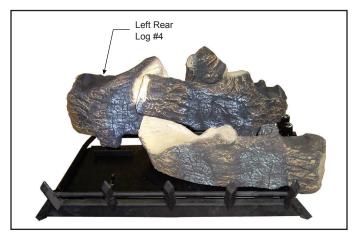


Figure 4. Place Left Rear Log #4

Place left front log (#5) on left pin located on burner and left grate bar. Rest top right portion of log on right front log. See Figure 5.



Figure 5. Place Left Front Log #5

6. Place top left log (#6) on unit by placing grooved portion of log onto left grate bar with bark facing outward. Rest front part of log in groove on left front log. See Figure 6.



Figure 6. Place Middle Left Log #6

7. Place left top log (#7) on left rear log (#4) and left front log (#5) using locating grooves on bottom of #7 and locating blocks on logs #4 and #5. See Figure 7.



Figure 7. Place Left Top Log #7

8. Place right top log (#8) onto right rear (#3) and right front (#2) logs using locator on bottom of right top log. See Figure 8.

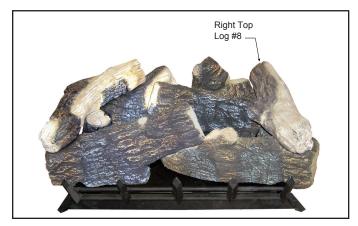


Figure 8. Place Right Top Log #8

PLACE THE DECORATIVE ROCK

Optional volanic rock may be placed around the unit on the floor of the firebox. Be sure to avoid any areas on the burner itself.

DO NOT sprinkle volcanic rock on the logs, around the pilot, or on or near burners. This may cause sooting. Place volcanic rock only on the floor of the fireplace.

During initial operation of the new heater, new burning logs and/or rock wool will give off a paper burning smell and orange flames will be present. Simply open the windows for a few hours to vent the odor.



Monessen, a brand of Hearth & Home Technologies 7571 215th Street West, Lakeville, MN 50044 www.monessenhearth.com